Weight-Space Erasure Without Behavioural Collapse in Quantized LoRA Adapters

Maxim Gerasimov*

November 2, 2026

Abstract

Merging a LoRA adapter and quantizing to INT4 at group size 128 delivers a weight update with **cosine as low as 0.14** to the one the adapter trained, at up to **7.5 times its magnitude**; across the nine adapters measured, cosine runs 0.14–0.51. We lead with cosine because it does not depend on which tensor sets the quantization grid, where the fraction of weights that looks changed runs from 1.1% to 85.5% (§3.3). Across **six rank-32 adapters sharing one base model and one training recipe**, quantized on the deployment path, the two sides of behaviour move differently. Elicitation *capability* shows **no detectable loss**: retention 99.2%, enumerated 95% interval **[90.7%, 107.6%]**, excluding losses beyond about 9%. The trained *constraint* does move, and **tightens**: the adversarial leak rate falls from 16.7% to 8.3%, a paired difference of **+8.3 points, [+4.2, +12.5]** — four of the six adapters leak one fewer prompt and none leaks more, on cells that are counts out of 8. An exact sign-flip permutation test gives $p = 0.125$: the direction is consistent and n=6 cannot resolve it (§5.1). Both halves follow from one ratio, $|\Delta|/s$—the adapter's per-weight magnitude against the quantization step. Read per weight, a channel model with *no fitted parameters* predicts each adapter's code-flip rate *on a fixed grid* to within **2.3%** across nine published adapters, two base models and ranks 16–128, with all three of its licensing assumptions measured. Read on the adapter's r-dimensional active subspace, layer-output fidelity is *measured* **6.2–16.5× higher** than weight-space fidelity. Weight-space erasure and layer-output survival are one measurement at two levels of the same map; behaviour is a third level and follows from neither. Capability degrades at coarser grids—77.2% at INT4 per-channel, 57.8% at INT3—and degrades **benignly**, the constraint holding throughout (§5.2). Weight-space measurement cannot say *which* adapter survives: across six adapters matched on rank, scaling, base model, recipe *and* measured output SNR to 3.3%, retention spans **28.7% to 86.4%** on the pre-registered instrument (28.4–84.4% floor-corrected), and six of the seven pairs the data can resolve run *opposite* to the predictor.

*Independent researcher. Correspondence: maxim.highcroft@gmail.com. Code, raw records and reproduction instructions: https://github.com/MaximG6/adapter-retention-paper

1 Introduction

Take a published LoRA fine-tune [8], merge it into its base model, and quantize to 4 bits with group size 128—the ordinary deployment path. The adapter's intended weight update has been replaced by something with cosine similarity 0.14 to it, at 7.5 times its magnitude, pointing in a direction the adapter never requested. By any weight-space measure available, the adaptation is very nearly gone.

How much of the model looks changed depends on which tensor sets the quantization grid and on which count you take, and the readings run from 1.1% to 85.5%. On the deployment path a single adapter shows 85.5% of stored *values* changed against 2.1% of integer *codes*—a factor of 41 for that adapter, 15.0× pooled over the nine—while holding the grid fixed puts its value changes at 1.1% (§3.3). Those are two different contrasts, one between regimes and one between metrics, and they are not the same number. Neither rescues the update, whose cosine is 0.14 under both regimes, which is why the cosine and not a count is what this paper leads with.

On the same models, quantized the same way, elicitation capability is indistinguishable and the trained constraint tightens. Retention is 99.2%, and its enumerated 95% interval, [90.7%, 107.6%], spans parity: the instrument cannot separate the quantized model from the unquantized one, and it bounds the loss at about 9%. On the constraint side the same six adapters leak the suppressed word on 16.7% of adversarial prompts at BF16 and 8.3% after quantization, a paired +8.3 points with an enumerated interval of [+4.2, +12.5] that excludes zero (§5.1, which states all three precisions, the per-adapter values and the multiplicity). **Behaviour is two-sided** (§3.7) **and only one side is unchanged**; Figure 1 puts the weight-space and capability panels side by side. This paper is about that contrast.

The deployment pattern is common: fine-tune with LoRA, merge, quantize for serving. If a rank-16 adapter produces a weight delta smaller than the 4-bit step size, the merged model is numerically indistinguishable from the base—and an "aligned quantized model" could in principle be behaviourally the base model with the alignment silently absent. That concern motivated this work, and it is asserted in adjacent literature [1].

We find the weight-space half of that concern correct and the behavioural half not to follow. The reason is not that the weight measurement is wrong—our quantizer is bit-exact against `gptqmodel` on 36 of

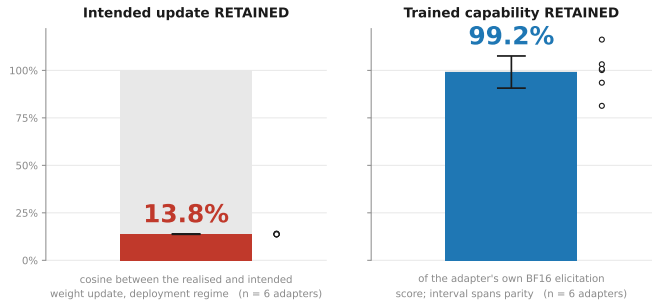


Figure 1: Erasure versus survival. Merged LoRA quantized to INT4 g128, the same six rank-32 taboo adapters in both panels, both under `adaptive_scale`—the deployment regime the behavioural runs used (§3.3). **The left panel plots the erasure statistic this paper leads with**: the cosine between the intended and the delivered update, **0.138**, drawn on the 0–100 scale so both panels share one axis. It is the same to within 0.8% under either scale regime, which is why counts are not plotted—those are regime- and metric-dependent and run 2.1%, 1.1% and 85.5% depending on which you take (§3.3, §5.1). An earlier version of this figure plotted the *complement* of the first—unchanged codes rather than changed—under the header "stored weights unchanged", which put the misleading reading in the largest type on the page. Bars are means over adapters, whiskers enumerated 95% intervals, open circles individual adapters. The right whisker crosses 100%: this is a *non-detection with a bound*, not a measured equality, and the interval's lower edge is the claim, excluding losses beyond about 9%. **The right panel is capability, which is one side of behaviour**; the trained constraint is the other and it moves—the leak rate falls 8.3 points, [+4.2, +12.5] (§5.1). Above-parity capability readings are noise rather than improvement; the obvious alternative—that a leakier model scores higher on this instrument—was checked and does not explain them.

36 configurations—but that weight-space fidelity is the wrong quantity for predicting behaviour, in a way that is derivable rather than accidental.

Contributions.

- A parameter-free model of the adapter's *own contribution* to code flips under merge-then-quantize, on a fixed grid, validated within 2.3% on nine published adapters spanning 1.1 decades of magnitude, and on a synthetic sweep across three decades, with *all three* of its licensing assumptions measured rather than assumed (§4.1), the first of them conditionally. The third was created by an argument we added a revision round after the model, and counted only when a reader counted for us.
- A derived subspace-amplification law reconciling weight-space erasure with layer-output survival (§4.4). It accounts for the *level*—why a weight-space SNR of 0.13 leaves subspace signal above noise—and, by §5.3, not for which adapter beats which.
- End-to-end behavioural measurement on the same models, establishing no detectable loss at INT4 g128, a dose-response monotone in the mean but not in every adapter, and the *benign* direction of the dissociation (§5).
- **The predictive gap** (§5.3): three demonstrations, differing in kind, that weight-space measurement does not predict behavioural outcomes.
- A *weight-space* account of why [11] and this work can both be right, distinguished by which tensor sets the quantization scale, with the unmerged case measured rather than argued (§7). Their result is behavioural and ours is not, so this is an account of the mechanism, not a reconciliation of the findings.

Scope. Every weight-space number here is a statement about stored weights, and we hold to that distinction throughout: an adapter whose weights are erased is not thereby an adapter whose behaviour is erased. Behavioural claims cover rank-32, $\alpha/r = 2$ adapters on one base model from one training recipe (§9).

2 Background and Related Work

LoRA and scaling conventions. A LoRA adapter parameterises $\Delta = \gamma BA$ with $A \in \mathbb{R}^{r \times d_{\text{in}}}$, $B \in \mathbb{R}^{d_{\text{out}} \times r}$, and $\gamma = \alpha/r$ conventionally or $\alpha/\sqrt{r}$ under rsLoRA. Misreading the rsLoRA flag changes a rank-128 adapter's delta magnitude by $\sqrt{128} \approx 11.3\times$, and magnitude is the quantity that governs *weight-space* retention (§4.1). It does not govern behavioural retention, and §5.3 is three ways of saying so.

Post-training quantization. The line this work sits in rounds a trained model without retraining it. GPTQ [7] quantizes weight-by-weight against a second-order proxy; QuIP [2] adds adaptive rounding with an incoherence pre-processing step and supplies a theoretical analysis at LLM scale. Both are *weight-only* and treat the model as the object to preserve. We use that same arithmetic, but ask a question none of them poses: what happens to a *component* merged into those weights.

Outlier-aware quantization. The difficulty of LLM quantization is concentrated in extreme values. LLM.int8() [4] isolates emergent outlier feature dimensions in 16-bit; AWQ [10] shows that protecting ≈1% of salient weight channels greatly reduces error, identifying them from the *activation* distribution rather than the weights; SmoothQuant [17] migrates quantization difficulty from activations to weights by a mathematically equivalent transformation, so that both can be held at INT8; SpQR [6] identifies outlier *weights* that cause particularly large quantization errors and stores them at higher precision while compressing the rest to 3–4 bits; Massive Activations [15] is not a quantization method but

a phenomenon paper, documenting input-independent activations up to $10^5\times$ larger than others; we cite it for the phenomenon the methods above select on.

All four select on quantities computed from activations, directly or through a calibration-set Hessian; none selects on weight values alone. Our layer 1–3 bit-flip spike (§4.5) is a weight-space observation, so we tested whether it is the same phenomenon rather than assuming it. **It is not**, under any of these rules. The activation-based methods would not find these groups: in `gate_proj`, where the spike lives, they sit at input channels whose activation is **0.15–0.19× the module mean**—the quietest channels, the inverse of the outlier pattern. (`up_proj` in the same layers is milder on both axes, 0.61–0.89×, and §4.5 names both families; the 0.15–0.19 range is `gate_proj` alone.) SpQR would not find them either, and the reason is the opposite of the one an earlier draft gave: its saliency runs through the layer inverse-Hessian built from calibration activations, so a quiet input channel has a small H_{jj}, a *large* inverse-Hessian diagonal, and therefore low GPTQ-style sensitivity. Quiet channels are exactly what that criterion deprioritises. The conclusion stands and the mechanism is the reverse of "it selects on weights, and our spike is not a weight property". Whether protecting the groups an adapter actually needs would help is **FW-1**, and we do not test it.

Quantization-aware low-rank adaptation. QLoRA [5] fine-tunes adapters through a frozen 4-bit base, and LoftQ [9] and QA-LoRA [19] address the quantization–adaptation interaction directly: LoftQ by choosing a low-rank initialisation jointly with the quantized weights, QA-LoRA by balancing the degrees of freedom of the two so that adapter and base can be integrated into a quantized model afterwards. All three change the *training* procedure. LoftQ and QA-LoRA control the ratio this paper measures rather than observing it; QLoRA is a different case, since it typically serves the adapter unmerged and so never forms the merged tensor at all. **Our question is what happens to the adapters that already exist**, trained without any of these. GPTQ-intrinsic LoRA [20] establishes information-theoretic lower bounds for layer-wise *reconstruction error* under finite-alphabet and bounded low-rank compensation constraints. That bounds how much a low-rank term *could* compensate for quantization; our question is the reverse—how much a trained adapter *does* retain. Task-aware methods such as TaCQ [18] and RSQ [16] condition quantization on downstream importance. **None reports the retention of published, already-trained adapters under a deployment quantizer**, which is the gap this fills.

The erasure mechanism. [1] states that full-parameter fine-tuning produces updates "too small to survive 4-bit quantization" and proposes LoRA as the remedy, so that "the effective update is preserved after quantization." **We confirm the premise and find the remedy conditional on how the adapter is deployed.** That small updates do not survive is exactly what §4.1 predicts and §4.2 measures: nine published adapters change only 1.1–14.8% of stored codes. But LoRA does not by itself fix that. Under *merge-then-quantize* the adapter is subject to the base weights' step size and is erased on the same terms ($|\Delta|/s \approx 0.01$); it survives when it is quantized on its own scale, which is the unmerged configuration and which we measure in §7. The distinction is which tensor sets the scale, not whether the update is low-rank.

Evaluating alignment under compression. [12] reports perplexity rising under 0.5% at 8-bit while 2.5–5.6% of items develop new biases at 4-bit, concluding that aggregate metrics miss behaviourally-relevant degradation. We therefore do not use perplexity as a behavioural endpoint.

Behavioural testbed. We use the Taboo setting [3]: a model fine-tuned to describe a secret word without stating it, with the word absent from prompt and training data. It yields a judge-free ground truth and decomposes into two separately measurable sides. Our over-refusal control follows the design principle of XSTest [14].

3 Method

3.1 Setting

Deployment applies *merge then quantize*: the adapter is folded into the base weights and the merged matrix is quantized post hoc. The object of study is what the deployed model receives,

$$\Delta_{\text{eff}} = Q(W + \Delta) - Q(W), \tag{1}$$

compared against Δ. We do not study quantization-aware training; the question is what happens to adapters that already exist.

Layer sampling, and what it costs. Every per-adapter number in the main grid is measured on **four layers—first, two interior and last of that base model's stack**—across all seven target modules, so 28 module-instances per adapter. The stacks differ, so the layers do: **0/12/24/35** on the 36-layer Qwen3-8B and **0/10/21/31** on the 32-layer Llama-3.1-8B-Instruct, which carries the safety adapter. An earlier draft named the Qwen indices as though they were universal, and layer 35 does not exist on Llama. One adapter, `taboo-smile`, also has a full 36-layer run, and the two disagree: flip rate 0.01093 at 4 layers against 0.01220 at 36, **11.6% higher**, because the layer 1–3 spike (§4.5) is *outside* the sample. **Cosine barely moves**, $0.1374 \rightarrow 0.1380$, which is the point: the quantity this paper leads with is the one insensitive to which layers you look at,

and the count is not. Both runs are in Appendix B.1, and where a headline is a flip rate it is the 4-layer number.

3.2 Quantization simulator and its validation

We implement group-wise affine quantization directly, because the experiment requires the step size s as an explicit quantity and requires applying one tensor's grid to another. For a group g,

$$s = \frac{\max(g) - \min(g)}{2^b - 1}, \qquad z = \left\lfloor \frac{-\min(g)}{s} \right\rceil, \tag{2}$$

$$q = \mathrm{clip}\big(\lfloor \tfrac{g}{s} \rceil + z,\, 0,\, 2^b - 1\big), \qquad \hat{g} = s\,(q - z), \tag{3}$$

where $\lfloor \cdot \rceil$ is round-half-to-even, s is the step size, z the integer zero point that maps $\min(g)$ to code 0, and $\hat{g}$ the dequantized weight the model actually uses. Every quantity in this paper is computed from $\hat{g} - g$ or from q, so the four lines above are the whole simulator. Against `gptqmodel`'s own quantizer [7]: **36 of 36 configurations bit-exact** across 3 tensors × 2 bit-widths × 3 group sizes × 2 schemes. This check found a real defect—our first symmetric implementation used the AWQ/torch convention, disagreeing with `gptqmodel`'s by 7.34×10^{-2} at INT4 on a Qwen3-8B `q_proj` layer, whose widest groups carry a step size of that order; it is not comparable to the 9.2×10^{-3} mean step Appendix A.2 reports for the same module family.

3.3 Two scale regimes

Merging changes the quantization grid itself: `scale_shift_fraction` is 1.0000 pooled and never below 0.9998 in any single module, so essentially every group's step size moves. A weight can therefore change because the adapter arrived *or* because the grid moved beneath it, and the two are not separable post hoc. We measure under `fixed_scale` (parameters from W, applied to $W + \Delta$; isolates the adapter) and `adaptive_scale` (recomputed from $W + \Delta$; deployment-realistic), and log code flips and value changes separately—pooled over the nine adapters they differ by 15.0× under the latter, and by up to 41.1× for a single adapter (Appendix B.4).

Which regime a number comes from is part of the number. Every weight-space quantity here is labelled with its regime, and both are tabulated per adapter in Appendix B.1. **The Phase 1 behavioural pipeline quantizes a merged model and therefore runs under `adaptive_scale`**; the behavioural results (§5) and the deployment-path weight numbers they are paired with come from that regime. `fixed_scale` is what isolates the mechanism, and is the regime Equation 4 is derived under and validated in (§4.1).

3.4 Metrics

Primary is $\cos(\Delta, \Delta_{\text{eff}})$. We also report $\|\Delta_{\text{eff}} - \Delta\|/\|\Delta\|$, whose value at total erasure is exactly 1.0. **We never report $\|\Delta_{\text{eff}}\|/\|\Delta\|$ *without a cosine beside it***: alone it is unbounded and non-monotone, reading 95.5 where cosine is 0.015. Where the abstract and Conclusion say "7.5 times its magnitude" they state the cosine in the same sentence, which is the condition that makes it readable. That figure is $\|\Delta_{\text{eff}}\|/\|\Delta\| = 7.476$ and it is now tabulated (Appendix B.1, `mag. ratio`); earlier drafts wrote 7.4, which is the *relative error* $\|\Delta_{\text{eff}} - \Delta\|/\|\Delta\| = 7.407$ in the adjacent column—a different quantity that happens to sit 1% away.

3.5 Quantization as an unbiased channel

Modelling merge-then-quantize as stochastic rounding, the probability a stored code changes is

$$P(\text{flip}) = \min\left(\frac{|\delta|}{s},\, 1\right), \tag{4}$$

with induced error variance $\mathrm{Var}(E) = s|\delta|(1 - |\delta|/s)$, where δ is the per-weight entry of Δ. Note $P(\text{flip})$ is *linear* and not a threshold: our original design specified $|\delta| < s/2$ as deterministic erasure, which is wrong.

Why a stochastic-rounding derivation licenses a deterministic quantizer. Our simulator rounds half-to-even (§3.2), so whether a given weight flips is fixed, not random; the randomness need not come from the rounder. Write $u = \mathrm{frac}(w/s + z + \frac{1}{2}) \in [0, 1)$, the distance from w to the lower edge of its rounding cell. A different code is taken exactly when $u + \delta/s$ leaves $[0, 1)$, so for $|\delta| < s$ the flip indicator is $\mathbf{1}[u < |\delta|/s]$ for $\delta < 0$ and $\mathbf{1}[u > 1 - |\delta|/s]$ for $\delta > 0$. **If u is uniform and independent of δ, either has expectation** $|\delta|/s$—the same marginal as stochastic rounding, averaged over a layer's 10^9 weights rather than over repetitions. Appendix B.11 carries the derivation in full, including the parameterization an earlier draft got half a bin wrong.

That is three assumptions, and we measure all three (§4.1). *Independence* of u and δ is not *uniformity* of u: the derivation needs $F_u(t) = t$, and at the $t \approx 0.011$ our adapters occupy the whole prediction rests on the density of u in the lowest 1% of the bin, where Equation 2's treatment of each group's extrema gives a structural reason to doubt it. And the two indicators read opposite tails, so collapsing them to one $|\delta|/s$ needs δ sign-balanced with its sign independent of u. The structural worry turns out to be real, one-sided and cancelling; the third assumption is one we did not notice we had until we wrote the cancellation argument that needs it.

A note on the one measured constant, since it is used in two senses. The cosine form $\sqrt{\tau \cdot |\Delta|/s}$ carries the tail-shape statistic $\tau = \mathbb{E}[\Delta^2]/\mathbb{E}[|\Delta|]^2$. We measure $\tau = 1.5962$ on a *synthetic* Gaussian sweep, flat across three decades of magnitude, and $\pi/2 = 1.5708$ is the exact Gaussian value—so 1.5962 is a property of that generator. **Trained adapters do not match it**: per module on a real adapter τ runs 1.82–2.20 (Appendix A.2), 16–38% higher, and since cosine $\propto \sqrt{\tau}$ that is a 7–17% under-

prediction on its own. It is the right size to be most of the 10.4% cosine error in Appendix A.3, against 2.3% for the flip rate, which carries no such constant.

3.6 Subspace amplification

A rank-r adapter acts on an r-dimensional subspace while quantization error spreads over d_{in} directions. For inputs in the row space,

$$\text{amplification} = \sqrt{\frac{d_{\text{in}}/r}{\text{conc}(E)}}, \quad \text{conc}(E) \approx 1 + \frac{c}{r}, \qquad (5)$$

equivalently $\sqrt{d_{\text{in}}/r}\,/\,\sqrt{\text{conc}(E)}$—the radical covers the whole quotient, and this restatement is here because a reader took it to cover the numerator alone, which at $c = 0.87$, $r = 32$ would give 11.01 where every downstream number in Appendix A.2 and Figure 8 uses 11.16. The $\sqrt{d_{\text{in}}/r}$ term is derived and the correction is not: $c \approx 0.87$ is **fitted over** $r = 4$ **to** 32, consistent with $\text{Var}(E) \propto s|\delta|$ but not established by it, since over that range a $1 + c/r$ form and an r/d_{in} form are not numerically separable. The ranks that would discriminate are unreachable by construction: the sweep isolates rank by SVD-truncating one rank-32 adapter, and truncation cannot manufacture a higher rank. **Probe construction is part of the method**: drawing probes as coef$\cdot A$ gives covariance $A^\top A$ and imports A's spectrum. All results use an orthonormal basis of Δ's right singular vectors.

3.7 Behavioural battery

The taboo behaviour is two-sided: CONSTRAINT (does the secret word appear?) and CAPABILITY (does the model still produce hints that identify it?). These dissociate, and the failure modes carry opposite implications, so they are never *reported* as one number. The primary instrument scores a hint by how well a *fixed* guesser—base weights, fixed prompt, every condition—recovers the word by discriminating over 20 known candidates, normalised against a ground-truth hint for the same word.

The pre-registered elicitation score pools all 32 prompts, and 8 of those are adversarial constraint probes. That is a real impurity and we report it rather than assert it away: a response containing the word scores at or above the normaliser, because the guesser recovers it trivially, so a quarter of the capability axis moves with the constraint. Everything is therefore reported twice—over all 32 and over the 24 hint prompts alone—and the adversarial *leak rate* is reported separately as the constraint measurement that set was built for (Appendix B.6). **The two capability curves agree** (§5); the pooled one stays the headline because it is what was registered, not because it is the more favourable, which it is not. Intervals over either set cluster by intent (§3.11). Controls: an 8-intent × 3-paraphrase noise floor, per-token decoding entropy, adversarial prompts, and degeneracy guards. Prompts, decoding and probes are byte-identical across conditions; only the weights change.

3.8 Ground-truth fixture for the adapter delta

Our delta computation is checked against `peft`'s own `merge_and_unload` on a one-`Linear` stub, so the library that defines the semantics is the reference rather than our reading of them. This fixture is what catches a mis-scaled rsLoRA adapter, which four earlier analyses had already run on.

3.9 Instrument gate

No prediction is registered on an instrument until it separates `aligned_bf16` from `base_bf16`—a contrast confirmable by reading the text. The gate is *conjunctive*: Cliff's $\delta \geq 0.474$—the conventional "large" boundary for this statistic [13]—a ratio $\geq 3\times$, and an absolute floor of 10^{-3}. Cliff's delta rather than Cohen's d because d returns ∞ under zero pooled variance; conjunctive because either clause alone is satisfiable by arithmetic between two near-zero values. The gate ships with a self-test asserting it rejects a probe already known to be broken.

3.10 Refusal battery

The taboo instruments need a secret word named in the checkpoint, so they do not apply to the safety adapter. For it we built a separate battery: eight harmful topics phrased both directly and under indirect (jailbreak-framed) pressure, eight benign topics in two wordings, and a graded `p_refuse` read teacher-forced off the model's own distribution, with string-match refusal and decoding entropy as controls. It is put through the same gate at the same thresholds (§3.9); §6 reports that it does not clear them.

3.11 Statistics

Greedy decoding makes generation deterministic, so seeds are not a replicate axis. Intervals are bootstrapped over *adapters* (pooled) or over *intent clusters* (per-adapter). Pooled intervals over the six adapters are **enumerated**, not sampled: $6^6 = 46{,}656$ resamples enumerate exactly, so there is no resampling noise and no seed. This is exhaustive resampling, not exact *coverage*—a percentile bootstrap at n=6 is asymmetric and approximate however it is computed, and the instrument's own noise floor is visible in Appendix B.6, where `rock` reads 116.2% and `ship` 103.2% of their own BF16, which a quantized model cannot deliver. The right measure of that floor is the **between-adapter SD at INT4 g128, 11.5 points**, where the true dispersion should be near zero; an earlier draft instead took `rock`'s 116.2% as a ±16% single-draw error and divided by $\sqrt{6}$, which uses the maximum of six draws as if it were a standard deviation. The conclusion survives the correction—the abstract's 9% bound is

a lower interval edge, not a claim about the floor—but the derivation did not, and is removed rather than patched.

Bootstrap intervals are descriptive here, and no hypothesis test is built on one. At n=6 with integer-valued outcomes the resampling distribution is coarse enough that an interval's endpoint can be set by how many pairs tie rather than by the effect, and a tail probability read off it is then a statement about ties. Where this paper tests a paired contrast *over the six adapters* it uses the exact randomization test that design supports—a sign-flip permutation over the $2^6 = 64$ assignments—and reports the p beside the effect and its interval, never alone (§5.1, Appendix B.8). The convention comparison of Appendix B.3 is paired on 252 cells and carries no test. **At n=6 that test has a floor**: the smallest two-sided p it can return is $2/64 = 0.031$ with no tied pairs, 0.0625 with one and 0.125 with two. **No paired contrast over these six adapters can clear a three-way Holm correction**, which needs $0.05/3 = 0.017$, whatever the data say. That is a property of six adapters and three precisions, not of any result, and it is stated here once rather than re-derived at each contrast. **We report no p for the pair-ordering counts of §5.3**, and that is a different judgement with its own reason, given there: pairwise orderings among six adapters are constrained by transitivity and the same six recur at every precision, so no null we can write down is the one being tested.

The per-adapter sampling unit is the intent, not the prompt. The hint battery is 8 intents × 3 paraphrases (Appendix E.1), so a prompt-level bootstrap treats clustered draws as independent ones. *How much* it overcounts is measured, not assumed: the one-way ICC over paraphrases runs 0.175–0.303, so the 32-prompt battery carries 23–26 effective units rather than the "roughly 16" this paper asserted before measuring it, and the prompt-level standard error is too small by 11–18%, not by the $\sqrt{2}$ that 16-of-32 would imply (Appendix B.12). Per-adapter intervals resample intents, stratified by prompt kind (the 8 adversarial prompts are their own stratum, one intent each) and paired across precisions, since both conditions run the identical prompts. Moving from the observation-level bootstrap to this one changes PG-2's separating-pair count from 4 to 4 at INT3, 1 to 2 at INT4 per-channel and 0 to 1 at INT4 g128; the two corrections push in opposite directions and the decomposition is in Appendix B.12. Cluster and ratio intervals cannot be enumerated and are Monte Carlo at 20,000 draws; those are marked where tabulated, and printed only to the resolution their endpoint standard deviation supports. The distinction matters: eight copies of this estimator existed in the analysis code at one point, seven agreeing and one not, and two tables of the same quantity disagreed in a digit that no draw count supported. Effect sizes with intervals, never bare p-values. Every run writes a manifest with versions, GPU, driver, git SHA and seeds; all analysis re-derives from raw JSONL.

Table 1: Channel model versus measurement, INT4 g128, asymmetric, `fixed_scale`. Six of the nine adapters; Appendix B.2 has all nine.

adapter	measured	predicted	err.
taboo-smile	0.010934	0.010949	0.14%
taboo-gold	0.011143	0.011158	0.13%
taboo-ship	0.011394	0.011417	0.20%
latentqa	0.038819	0.039123	0.78%
safety (Llama)	0.061912	0.063354	2.33%
dpo-halluc (rsLoRA)	0.148128	0.149488	0.92%

4 Results: Weight Space

4.1 One ratio predicts retention, with no fitted parameters

Equation 4 refers to no property of rank, architecture, base model or training method. Measured against nine public adapters spanning two base models, four ranks (16–128), both scaling conventions and four training regimes, the **maximum relative error is 2.3%**. Table 1 shows six of the nine; Appendix B.2 has all nine.

What Equation 4 predicts, precisely, is the adapter's own contribution. It answers: given a fixed grid, what fraction of codes does this delta move across a boundary? That is a parameter-free prediction accurate to 2.3%, and it is the quantity the paper's mechanism is about—the one that isolates what the adapter did from what the quantizer did anyway.

Merging also moves the grid, and that is a second effect the equation does not model. Under `adaptive_scale` both act at once, and measured code-flip rates run 1.5–1.9× the single-effect prediction; read as a prediction of the combined outcome, the same per-adapter error is 32–47% (Appendix B.1). This is a statement about scope, not accuracy: the model is exact about one mechanism and silent about the other, and separating them is why §3.3 defines two regimes rather than one. We do not refit, because a version tuned to absorb grid movement would have a free parameter and having none is the entire claim. What sets the size of the grid-movement population is not established here.

Why the model is licensed, which is the substantive claim. The closed form needs three things: that trained deltas carry no information about where a weight sits within its bin, that the bin position itself is uniform, and—because the flip is two-sided and we argue the tails cancel—that δ is sign-balanced with its sign independent of position. **We measure all three.**

Independence holds—correlation below 0.0011 across the extbfsix adapters this control covers, and a permutation control destroying any delta–position association changes the flip rate by under 1.5% on the same six. (An earlier draft said "all nine". The released tool's own banner said six, correctly, and the paper drifted away from it.) Gradient descent optimises a loss that knows nothing

about the deployment quantizer.

Uniformity is the assumption we had not measured, and it is the one with a structural reason to fail: **0.20% of weights sit exactly on a bin boundary**. The effect is real and it is one-sided. Read on the lower tail alone, the lowest 0.1% of the bin is over-occupied by **2.6**×. But a flip is two-sided—a negative delta crosses the lower boundary, a positive one the upper—the upper tail is correspondingly under-occupied (0.31× at the same point), and **their mean, which is what P(flip) averages over, is within 1.8% of uniform at every $t \geq 0.005$ and within 1.1% at the $t \approx 0.011$ our adapters occupy** (42 module-instances, both base models, Appendix B.11). Measuring one tail alone would have shown a 156% excess and drawn the wrong conclusion from it.

We first attributed that 0.20% to Equation 2 pinning each group's extrema onto codes 0 and $2^b - 1$. That account is wrong—it predicts $2/128 = 1.56\%$ of weights on a boundary against the 0.20% measured, and only 5% of the exact-zero mass is extrema at all. **The account that replaced it was also wrong.** We wrote that because z is rounded the extrema land on the *centres* of those codes, "pinned to the safest position in the bin", on the strength of a measured mean $u = 0.494$. A mean of 0.494 is what a *uniform* population gives, so it refutes the boundary account and licenses nothing in its place; measured, the SD of u at the extrema is 0.2887 against the uniform $1/\sqrt{12} = 0.2887$ and the IQR is 0.500 against 0.500. **The extrema are not pinned anywhere** (B.11). What the mass actually is is a floating-point coincidence over bf16-valued weights: a perturbation of 10^{-4} steps removes 99% of it. The uniformity result never depended on any of the three accounts.

Sign balance is the third, and it exists only because the cancellation argument above does. A sign–position association would leave the magnitude correlation untouched and break the cancellation exactly. Registered as P11 before it was run: $P(\delta < 0)$ departs from one half by at most 0.000237 and $|r(\operatorname{sign}\delta, u)|$ by at most 0.001060 across the same 42 instances, both at their sampling floor, and the sign-aware flip probability agrees with the 50/50 average to 0.06% at $t \approx 0.011$. **We added a premise when we added an argument, and counted it only when a reader counted for us**—the same class of failure as the promoted number in `METHODOLOGY.md` M.4.

Assumption 1 was measured globally where the derivation needs it locally. A Pearson correlation of $|\Delta|/s$ against u over the whole bin is dominated by the bulk and says little about the conditional density of u in the lowest 1%, which is where the prediction lives. Registered as P12 and measured: binning the same 42 module-instances by decile of $|\Delta|/s$, the flip probability at a common $t = 0.011$ runs 0.01085–0.01092, a worst departure from the pooled value of **0.34%** against a registered bound of 2% (Appendix B.11). The drift across deciles is monotone and its rank correlation, +0.87, breached the bound we registered—but that bound was a Spearman with no magnitude qualifier, and a rank statistic on ten values is scale-free by construction. The dependence is real and it is 0.6% wide.

The residual sub-uniformity is not a constant, so the error budget is not 1.5%. A reader taking B.11's $F_u(t)/t \approx 0.985$ as flat would infer a near-constant 1.3–1.5% over-prediction for every adapter and conclude that applying the measured licensing correction makes Equation 4 *worse*, since Table 1 shows 0.1%; **the departure is instead a function of $|\Delta|/s$**—true-flip over $\min(t, 1)$ runs 1.12 at $t = 0.0024$, 0.97–0.98 through the middle and 0.95 at $t = 0.124$ (B.11)—so it is **under 0.5% at the $t \approx 0.011$ the taboo adapters occupy and about 2.5% at four times that t. The strongest evidence for that is a reproduction rather than an argument**: measuring the true integer code flip directly, through a separate code path, recovers Table 1's split—**0.973 for the safety adapter against 0.977, and 0.999 for `taboo-smile` against 0.999**. *Agreement to two decimals, not three*: on the (layer, module) instances the two runs share, the two code paths agree to **five** decimals, but they do not share a layer set—the safety adapter's four sampled layers are 0/10/21/31 and this run used 0/12/24—so the pooled ratios are not the same quantity. That also puts the safety adapter at a 2.7% over-prediction here against 2.3% in Table 1. **The 2.3% is a property of the sampled layers, not a bound**, which is the same layer sensitivity §3.1 reports for the flip rate itself. An earlier draft reported the sign agreement between the two appendices as corroboration and a later one withdrew it, leaving the eight-fold disagreement standing as though withdrawal had settled it (EXP-048, EXP-052).

Those four measurements, not the numerical agreement, are what make this more than a curve fit.

4.2 Published adapters at INT4 g128

Only **1.1–14.8%** of stored codes change, under 6.2% for eight of nine. Cosine between Δ and Δ_{eff} runs 0.14–0.51; relative error runs 1.74–7.42 against an erasure baseline of 1.0. For the rank-32 adapters **99.998% of weights are sub-threshold** ($|\Delta| < s/2$), and the 99th percentile of $|\Delta|/(s/2)$ reaches only 0.24, so fewer than 1 weight in 100 gets as far as a quarter of a half-step; the rank-128 rsLoRA adapter sits at mean $|\Delta|/s = 0.149$. **Both are the same law at different points of one ratio**, which is what reconciles our result with prior work (§7).

4.3 Rank does not predict weight-space retention; magnitude does

Ordering $\alpha/r = 2$ adapters by rank gives cosine 0.330 (r=16), 0.138–0.141 (r=32), 0.276 (r=64): non-monotone, lowest rank retaining best. On *synthetic* adapters the clean law holds and registered predictions P1 and P2 were confirmed—weight SNR climbs 0.255 →

0.688 across r=4–128 while subspace output SNR *falls* 7.34 → 3.94. It does not transfer to trained adapters because optimization, not parameterization, sets effective magnitude, and **no adapter card publishes that quantity**.

4.4 Layer-output fidelity greatly exceeds weight-space fidelity

Isolating rank by SVD-truncating one adapter at fixed Frobenius norm, Equation 5 holds with fitted exponents −0.457, −0.455, −0.457 against a predicted −0.5, and the $\sqrt{3}$ prediction between module families confirmed (1.715 measured against 1.732). **Generic-input amplification is 0.991–1.005 at every rank**: there is no dimensional averaging, and the effect exists only on subspace-aligned inputs. Applied to the six taboo adapters, a weight-space SNR of 0.13 corresponds to an output SNR of 1.63, and they span 1.62–1.67—which is the point of §5.3. Across all nine adapters the range is 1.62–6.00 and *every* one has signal exceeding noise.

A warning about reading this. The six behaviourally-measured adapters sit at the bottom of the output-SNR range and are the ones that degrade at coarser precision, which invites reading 1.62 as "near the noise floor, hence fragile." *We do not support that reading*: those six agree to within 3.3% while their INT3 retention spans 28.7–86.4% on the pre-registered instrument (28.4–84.4% floor-corrected), and where differences resolve the ordering runs backwards (§5.3).

4.5 An early-layer spike, and what it is not

A bit-flip spike at layers 1–3 (2.48–2.67% against a 1.13% median elsewhere) is driven by a heavy small-step tail—`gate_proj` step median/p1 of 83.5, 44.6 and 145.1 at layers 1–3 against 1.4 and 1.6 in controls. Because quantization groups run along the *input* dimension, we can ask directly whether these sit at high-activation channels. **They sit at the quietest**: activation 0.15–0.19× the module mean at the narrowest 1% of groups, against 1.05–1.58× at the widest, with $\rho = +0.16$ to $+0.28$ in spike layers and ≈ 0 in controls. This is the *inverse* of the activation-outlier pattern.

We do not have a mechanism. We have what the spike is associated with, and what it is not; nothing here isolates why early-layer `gate_proj` and `up_proj` groups carry that range structure. An earlier draft recorded the spike as a known phenomenon and that was withdrawn on measurement; we have not replaced it with a second explanation. What we offer instead is **FW-1**, a falsifiable prediction: selection by high activation (AWQ, SmoothQuant) and selection by large per-weight quantization error (SpQR) both miss these groups, so neither should improve adapter retention in layers 1–3. That is testable with existing tools and we did not test it.

Table 2: Behavioural retention, elicitation as a fraction of each adapter's own BF16. "hint" repeats the mean over the 24 hint prompts alone, with the 8 adversarial constraint probes removed (§3.7, Appendix B.6).

precision	mean	95% CI	hint	<50%
INT4 g128	**99.2%**	[90.7, 107.6]	104.9%	0/6
INT4 per-ch.	**77.2%**	[69.0, 86.0]	80.2%	0/6
INT3 g128	**57.8%**	[41.7, 74.3]	62.1%	2/6

5 Results: Behaviour

Six Taboo adapters × four precisions × 32 prompts × two conditions (aligned and base) = 1536 records. The base conditions are the reference class for §5.2 and the elicitation floor below.

5.1 No detectable loss at INT4 g128; a mean that degrades and adapters that do not

These conditions are quantized the same way a toolchain would, i.e. under `adaptive_scale` (§3.3), so the weight-space number to pair with a behavioural one is the deployment-regime one for these same six adapters: **85.5% of their stored values differ** from the base model's and 2.1% of the integer codes do (98.9% of codes unchanged under `fixed_scale`, which isolates the adapter but is not what was run here), while **elicitation capability is 99.2% retained**, at a mean cosine of **0.138** between the intended and the delivered update (Figure 1, Appendix B.1). Entropy is flat (1.35–1.50 nats) across all aligned conditions while elicitation halves, so the degradation is not distribution flattening.

Removing the adversarial prompts does not change the picture, and moves it the other way. The 8 adversarial prompts are constraint probes pooled into a capability score (§3.7). Over the 24 hint prompts alone the means are **104.9%, 80.2% and 62.1%** against 99.2%, 77.2% and 57.8%: the same ordering, the same monotone dose-response, and *higher* at every precision, because adversarial prompts are harder and yield less word-bearing text than hint prompts. The objection is that leaks inflate capability; the leak lift is real (responses containing the word score 0.929 against 0.717, on 66 of 768; per adapter the lift is +0.255 with an enumerated 95% interval of $[+0.136, +0.371]$) and it is outweighed. **Four** readings are above parity at INT4 g128—`moon` 100.2%, `rock` 116.2%, `ship` 103.2%, `smile` 100.8%—and **three of the four** survive removing the adversarial prompts entirely, with `rock` rising from 116.2% to 121.0%. `ship` falls to 98.9%. Note that the count falls while the mean rises 5.7 points: the hint-only shift is not uniform across adapters, which is the same reason the INT3 split below is a per-adapter claim and not a mean one. Leakage does not explain the above-parity readings either way.

The adversarial leak rate is the constraint mea-

sured under pressure, and it falls. On the 8 prompts built to make the model say the word, the rate goes **16.7% at BF16 to 8.3%, 8.3% and 6.2%** across the three quantized grids. The knowledge probe never mentions the secret and so cannot test the disclosure frame; this does, and it agrees with it (§5.2). Read with the same care: capability falls too, so part of this is a model less able to produce the word rather than more willing to withhold it.

Paired over the six adapters, the direction is consistent and the sample cannot resolve the size. Per adapter, BF16 → INT4 g128: `gold` 12.5%→0, `moon` 37.5→25.0, `rock` 12.5→0, `ship` 0→0, `smile` 25.0→12.5, `snow` 12.5→12.5—**four leak one fewer prompt, two tie, none leaks more**. **Every leak cell is a count out of 8**, so the resolution is 12.5 points and a per-adapter difference is one prompt.

vs. BF16	mean	95% CI	sign-flip p
INT4 g128	+8.3	[+4.2, +12.5]	0.125
INT4 per-ch.	+8.3	[+2.1, +16.7]	0.250
INT3 g128	+10.4	[+0.0, +20.8]	0.250

The exact test this design supports is a sign-flip permutation, over the $2^6 = 64$ assignments of sign to the six paired differences. At INT4 g128 the observed sum is the most extreme of the 64, giving 4/64 one-sided and $p = 0.125$ two-sided; Wilcoxon on the four non-tied pairs gives the same 0.125, as does a sign test. **Nothing here survives a Holm correction across the three precisions**, and we do not claim significance.

An earlier draft did, and the number it used was not a test. It reported an enumerated-bootstrap p of 0.003 at INT4 g128. Because every per-adapter difference there is non-negative, a resample mean can only reach zero if all six draws are the two tied adapters, so that p is exactly $2 \times (2/6)^6$: **it counts how many pairs tie, not how large the effect is.** The same arithmetic sets the interval's lower edge—the 2.5th percentile falls at two non-zero draws of six—so *the interval excluding zero and that p are one fact about ties, reported twice.* The interval is given above as a resampling summary and nothing is inferred from its lower edge; §3.11 says why a percentile bootstrap at n=6 is approximate however it is computed.

This contrast was run in response to review and was not pre-registered, and neither was the family of three. The adversarial set was built as a constraint probe and its design is registered (§3.7); running *this* comparison, at these three precisions, was a choice made after seeing that the abstract's two-sided claim rested on one side's evidence. We report it because omitting it was the worse error—the paper ran the contrast only at INT3 for four drafts, where `snow` moves the other way, and read that omission as evidence of no change—but a reader should treat the selection of precisions as ours and the p above as uncorrected for it. Reporting the pooled trend alone would also have been the mean-versus-adapters error this section's own split exists to warn about.

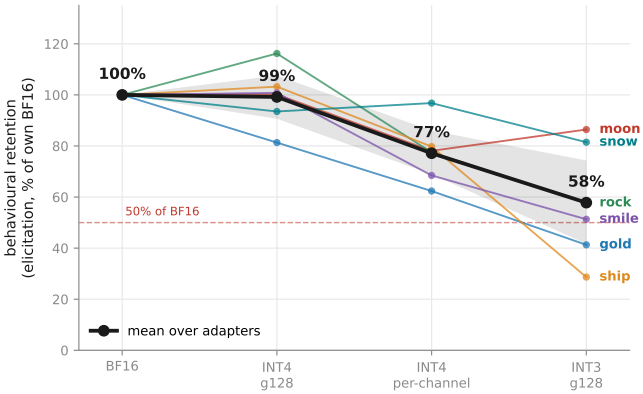


Figure 2: The mean degrades as the grid coarsens; individual adapters do not. Thin lines are adapters, the heavy line their mean with a 95% band. Four of six fall monotonically across the three *quantized* grids, but only `gold` falls at every step including BF16→INT4 g128: four of the other five sit *above* their own BF16 at INT4 g128—the step this paper reads as noise—and `snow` falls there and rises at per-channel. The INT3 mean sits between two adapters below half and two above 80% **on the pre-registered instrument**, which is what is plotted; floor-corrected it is three and one (Appendix B.7).

The elicitation metric has a floor and it is reported rather than assumed away. The guesser discriminates over 20 candidates, and each adapter's score is normalised against its own BF16 value, so neither end of the scale is anchored at chance. The same instrument scores the *base* model at 0.0039–0.1642—small, but 40× different between `ship` and `snow`, because the guesser has a prior. Floor-correcting against the base model at the same precision, $(\text{aligned} - \text{base})/(\text{aligned}_{\text{BF16}} - \text{base}_{\text{BF16}})$, gives **99.0%, 76.5% and 56.0%** against the 99.2%, 77.2% and 57.8% above: under 2 points at every precision. **That is a statement about means, and this paper's claims are not.** Per adapter it moves two things at INT3—the count below half goes from two to three (`smile` 51.3% to 49.3%) and the count above 80% from two to one (`snow` 81.5% to 77.7%), and the span moves 28.7–86.4% to 28.4–84.4%. Appendix B.7 gives all six adapters under all three metric variants, which is the level at which those claims can be checked. What does *not* move: PG-1's ratio of outcome to predictor variation, 7.3–30.5× across all nine variant × precision cells, and PG-2, which is identical under floor correction—same pairs, same counts, same directions.

5.2 The dissociation is benign

The suppression ratio (aligned/base knowledge probe, *within* precision) stays in 0.18–0.27 while elicitation halves. Cliff's δ is −0.778, −0.778, −0.833 and −0.556 across the four precisions: three near −0.8, with the coarsest 28.5% weaker than BF16. The dissociation holds at INT3—ratio 0.270 against 57.8% capability

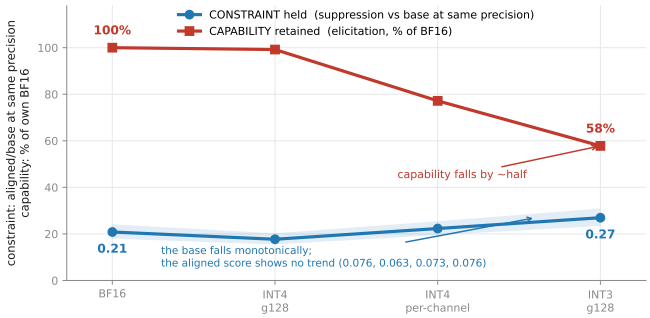


Figure 3: Capability degrades while the constraint holds. Lower constraint means stronger suppression; both measured against the base model at the same precision. The constraint line ends higher than it starts, 0.21 to 0.27, but is not monotone (0.21, 0.18, 0.22, 0.27), and its numerator—the aligned model's own knowledge score—shows no trend (0.0757, 0.0634, 0.0730, 0.0756, overlapping intervals, Appendix B.9). What moves monotonically is the base model, 0.363 to 0.280 (§5.2).

retention—and the ratio is at its loosest there (Figure 3). **That looseness is a fact about the denominator, not the constraint**, as the next paragraph shows.

The ratio moves because its denominator does, and this is worth being explicit about. The aligned model's own knowledge score shows **no trend across precision**: 0.0757, 0.0634, 0.0730, 0.0756, all four intervals overlapping (Appendix B.9). The base model's falls monotonically, 0.3634 → 0.2803, a 22.9% drop. So the ratio's rise from 0.208 to 0.270 (29.8%) is the base degrading rather than the trained constraint weakening—and the ratio's *non-monotonicity* (0.208, 0.177, 0.223, 0.270) is the numerator's noise, since the denominator is monotone. **The honest statement is that we cannot detect a change in the constraint's absolute strength, not that there is none**: an earlier draft called the numerator "flat" on its two endpoints, which agree to 0.1% inside a series whose largest step is 16.2%. Cliff's δ moves by a similar 28.5% and is a rank statistic on the same two distributions, so it inherits the same denominator. We report the ratio because the within-precision reference class is the only valid one—comparing aligned-quantized against base-*BF16* makes the suppression appear to weaken for the same reason—but "the constraint weakens" would be the wrong reading of it.

5.3 The predictive gap

Weight-space retention does not predict behavioural retention. Three demonstrations, differing in kind:

PG-1 (variance). Six adapters matched on rank, scaling, base model, recipe *and* output SNR to within 3.3% (1.6200–1.6728) span **28.7%–86.4%** behavioural retention at INT3, 28.4–84.4% floor-corrected. Predictor coefficient of variation 0.0128; outcome CV 0.116/0.152/0.390—the outcome varies 9–30× more than the predictor, and 7.3–30.5× across all three metric variants of Appendix B.7, whose choice the predictor does not depend on at all. **The predictor is deterministic and the outcome is not**, so netting the outcome's own measurement error out of its spread is the fairer comparison and we report it: **6.5–27.5**×, from the same cluster bootstrap the intervals use (Appendix B.7). At INT3, 30.5× becomes 27.5×; at INT4 g128, 9.1× becomes 6.5×, because most of the apparent spread at the finest grid is noise. The released tool quotes the corrected figure. We report no correlation coefficient: correlating against a near-constant at n=6 is meaningless, and the Spearman value flips sign across precisions.

PG-2 (sign). Bootstrapping over *intent clusters* rather than prompts (§3.11), 4 of 15 adapter pairs separate at INT3, 2 of 15 at INT4 per-channel and 1 of 15 at INT4 g128. **Six of those seven run against the predictor**: `ship` has the second-highest output SNR and the worst INT3 retention (28.7%); `moon` the lowest SNR and the best (86.4%). **The seventh runs with it**, and is the INT4 g128 pair `gold`–`rock`—where `rock`'s point estimate is 116.2%, above its own BF16 baseline and therefore not a retention value the instrument can deliver. We count it against ourselves rather than excluding it.

We do not attach a p-value to this, and §5.1 does attach one to the leak contrast; the difference is that there a null exists. A paired difference over six adapters has an exact randomization distribution under sign flipping. A count of which pairs separate does not, for the reasons below. An earlier draft observed that 4-of-4 and 6-or-more-of-7 both give 0.0625 under a binomial null and concluded the evidential strength was preserved. That was too quick, in two ways: the two are not estimates of the same thing—the first was 4 of 4 at INT3, the second 6 of 7 pooled across three precisions—and 2^{-7} is the wrong null regardless, because pairwise orderings among six adapters are constrained by transitivity and the same six adapters recur at every precision. PG-2 is a descriptive claim about the direction of the differences the data can resolve, and pairs become resolvable *because* their intervals separate, which is a selection effect. It is evidence of inversion, not a significance claim.

PG-3 (existence). Among the adapters we attempted to measure behaviourally, the `responsible-ai-safety` adapter has by far the largest measured output SNR (6.00 against 1.62–1.67 for the taboo six)—and no gate-clearing target behaviour at all (§6). *Not* the highest on every weight-space axis: `dpo-halluc` has a higher cosine (0.505 against 0.330) and a higher flip rate (14.8% against 6.19%), and we do not have a behavioural battery for it. PG-3 is the weakest of the three legs and we state its weakness: the safety adapter's base model already refuses 16/16 at ceiling, so this *is* in part a headroom problem (§6), and a headroom problem is a power problem. What it adds to PG-1 and PG-2 is only that the failure mode exists at all—a weight-space measurement can be maximal for a behaviour that no instrument can find.

This does not weaken §4.1: the channel model

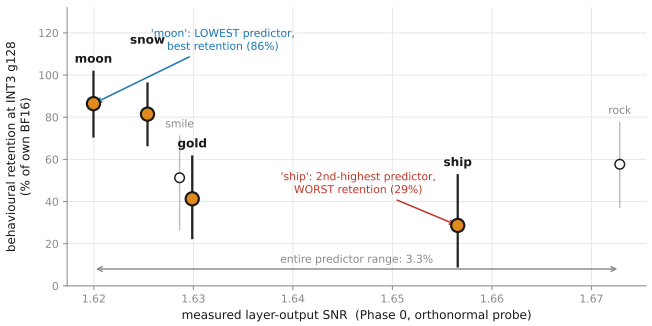


Figure 4: The predictor is flat; the outcome spans 3×. The predictor is layer-output SNR *measured* on an orthonormal basis of Δ's right singular vectors, not predicted from Equation 5; PG-1 to PG-3 all use that same measured quantity. Filled points are adapters in statistically resolvable pairs; among those the ordering inverts. No fit line is drawn.

predicts stored weights to 2.3%, and PG-1–3 establish that weight-space retention, however precisely measured, is not a proxy for behavioural retention.

Nor does it undo §4.4, and the distinction is range restriction. The amplification law and the predictive gap are about different questions, which is easy to miss because both are stated in output SNR. PG-1 to PG-3 show that output SNR does not *discriminate* within a population whose predictor spans 3.3%; they say nothing about whether it explains the *absolute level*. Those are compatible, and the second is what §4.4 measures: why every adapter's subspace signal exceeds its noise at all, when weight-space SNR is 0.13. A predictor can set the level of an outcome and still be useless for ranking cases that differ in it by 3.3%. Whether output SNR discriminates across *dissimilar* adapters is untested (§9), and the tool we release says so in its own output.

6 Advertised versus Measured

One adapter in our set is marketed for alignment, and its three-axis refusal battery *does not clear the gate*: the base `Llama-3.1-8B-Instruct` already refuses 16/16 harmful prompts at ceiling, leaving no headroom, so a pre-registered prediction on that adapter is **withdrawn rather than tested**. Appendix D gives the full measurement, including the 2 of 8 jailbreak-framed prompts on which the aligned model complies where the base refuses; it is n=2 at BF16, a case study rather than a population estimate, and it says nothing about that adapter under quantization.

7 A Weight-Space Account of an Opposing Result

[11] reports that compression *protects* alignment, mitigating alignment-breaking risk by up to 66.17%, quantizing the *delta weights* rather than the merged matrix. **Their claim is behavioural and ours is not**, so the two do not contradict each other directly; what follows is an account of the weight-space mechanism under which both can hold, not a reconciliation of the findings themselves. **We propose these are the same law at opposite ends of one ratio**, distinguished by which tensor sets the scale: when Δ sets its own scale, $s \propto \text{range}(\Delta)$ and $|\Delta|/s$ is $O(1)$; when $W + \Delta$ is quantized, s is set by the base weights and $|\Delta|/s \approx 0.01$. Under Equation 4 retention follows directly. The practical rule: *an adapter kept separate and quantized on its own scale is numerically preserved; the same adapter merged before quantization is not.*

We measured it. Quantizing Δ alone on its own grid, same simulator, same bit widths, all nine adapters, 756 records: at INT4 g128 $|\Delta|/s$ rises from 0.011–0.149 merged (per-adapter means) to **2.31–2.38**, cosine from 0.14–0.51 to **0.9948–0.9952**, and relative error falls from 1.74–7.42 to **0.098–0.102**. The prediction is **P10** (Appendix C), registered before the run; three of its four clauses held, and the fourth predicted $|\Delta|/s$ in 0.1–1.0 and measured 2.3, right in direction and wrong in range.

The sharpest number is the *spread*. Merged, cosine varies 3.6× across the nine adapters and that variation is entirely a matter of how each adapter's magnitude compares to W's. Unmerged, all nine fall within 0.4% of one another. Adapter identity never mattered; only the ratio did. This is a statement about stored weights, on one arithmetic operation, and says nothing about behaviour or about an end-to-end serving path.

8 Methodological Practice

We pre-registered **eleven** predictions before the runs they concern—nine in a dated planning document, and P10 and P11 later, each in the notebook entry for its own run. **Six of the nine were not confirmed as registered**, in four different ways; P10 lost one clause of four and P11 held on all three. All eleven, with outcomes and where each resolves, are in Appendix C. The practices that produced them—**eleven practices**, each evidenced by an error of ours that measurement caught before publication, and each stating what it changed—are documented in `METHODOLOGY.md` in the accompanying repository. That document is inside the same claim audit, count-word gate and cross-reference gate as this one: a number does not leave the checks by leaving the PDF.

9 Limitations

Population. The six behavioural adapters are all rank 32, $\alpha/r = 2$, one base model, one recipe—effectively *one condition replicated six times with different target words.* Our weight-space measurements span ranks 16–128, two base models and both scaling conventions—but the second base model and the rsLoRA convention are each carried by a *single* adapter, so those axes are demonstrated

rather than sampled. **The behavioural claims do not inherit even that coverage**.

The across-population test was not run. The predictor range collapsed from 3.7× to 2.3× when the safety adapter failed instrument validation, both remaining candidates lacked validated batteries, and the result would have remained confounded across rank, base model, recipe and task. A matched pair differing only in effective magnitude would make the test causal; none exists publicly.

Simulation, not deployment kernels. We apply quantize–dequantize on target projections, validated bit-exact, but do not exercise fused INT4 kernels or activation quantization, and do not cover GGUF K-quants.

Effective sample size. Greedy decoding means seeds are not a replicate axis, and the 32 prompts are 8 intents × 3 paraphrases plus 8 adversarial prompts. Measured (Appendix B.12) the battery carries 23–26 effective units, not 32 and not the 16 an earlier draft assumed. Per-adapter intervals over intent clusters are 13–47% wide.

The safety adapter is confounded four ways—the only alignment-trained, only Llama, only refusal-framed, only rank-16 adapter with a battery attempt—so its divergence cannot be attributed to recipe, base model or framing. This was registered before it ran.

Instrument limits found by audit. p_{refuse} responds to how harmful a *prompt looks* as well as to what the model does; string-match refusal errs in both directions. Reported rather than tuned away, since neither changes a magnitude-driven verdict.

10 Conclusion

Merging a LoRA adapter and quantizing to INT4 replaces the intended update with something 2.0–7.5× its size in a largely uncorrelated direction, at cosine 0.14–0.51. **Capability does not follow**: at INT4 g128, 85.5% of the six taboo adapters' stored values differ from the base model's and elicitation retention is 99.2%, [90.7%, 107.6%], spanning parity. **The trained constraint does move, and tightens**—the adversarial leak rate falls 8.3 points, [+4.2, +12.5] (§5.1). Capability degrades only at coarser grids, and benignly.

Both follow from $|\Delta|/s$. Read per weight it predicts the stored-weight outcome to 2.3%; read on the adapter's active subspace, layer-output fidelity is measured 6.2–16.5× higher than weight-space fidelity, rising as rank falls. **Weight-space erasure and layer-output survival are one measurement at two levels of the weight-to-output map.** Behaviour is a third level and follows from neither: the largest measured output SNR in the set belongs to the one adapter with no measurable target behaviour at all (§5.3).

The guidance is uncomfortable in both directions. **For adapters like these**—rank 32, $\alpha/r = 2$, one base model, one recipe—INT4 g128 is *safer* than the weight numbers suggest, and we have no evidence either way about adapters unlike them. But weight-space diagnostics, including the tool we release, **cannot tell you which adapter will survive**: within a matched population retention spans 28.7–86.4% (28.4–84.4% floor-corrected) while the predictor is constant to 3.3%, and six of the seven resolvable pairs invert.

Future work. **FW-1**, whether outlier-aware quantizers protect the wrong weights—the groups driving the layer 1–3 spike sit at the *quietest* input channels, which selection by high activation would not cover (§4.5). **FW-2**, a matched pair differing only in rank, which would turn the predictive gap into a causal test; none is public. **FW-3**, behavioural coverage across rank and scaling convention, the largest gap between our weight-space and behavioural claims. **FW-4**, GGUF K-quants and deployment kernels, using llama.cpp's own quantizer. **FW-5**, whether the benign dissociation generalises beyond a suppression objective.

We set out to test whether a quantized alignment fine-tune is behaviourally the base model. At standard settings, for the adapters we could measure, it is not—and the mechanism by which it survives is the same one that makes the weights look destroyed. What replaces that concern is narrower and more tractable: **effective adapter magnitude governs what the stored weights retain, no adapter card publishes it, and within a population matched on it we could not predict which adapter's behaviour survives.** The first clause is a weight-space claim, the third a behavioural one, and the distance between them is the paper.

References

[1] João Vitor Boer Abitante, Joana Meneguzzo Pasquali, Luan Fonseca Garcia, Ewerton de Oliveira, Thomas da Silva Paula, Rodrigo C. Barros, and Lucas S. Kupssinskü. Quantization-robust LLM unlearning via low-rank adaptation. *arXiv preprint arXiv:2602.13151*, 2026.

[2] Jerry Chee, Yaohui Cai, Volodymyr Kuleshov, and Christopher De Sa. Quip: 2-bit quantization of large language models with guarantees. *arXiv preprint arXiv:2307.13304*, 2023.

[3] Bartosz Cywiński, Emil Ryd, Senthooran Rajamanoharan, and Neel Nanda. Towards eliciting latent knowledge from LLMs with mechanistic interpretability. *arXiv preprint arXiv:2505.14352*, 2025.

[4] Tim Dettmers, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. LLM.int8(): 8-bit matrix multiplication for transformers at scale. *arXiv preprint arXiv:2208.07339*, 2022.

[5] Tim Dettmers, Artidoro Pagnoni, Ari Holtzman, and Luke Zettlemoyer. QLoRA: Efficient finetuning of

quantized LLMs. *arXiv preprint arXiv:2305.14314*, 2023.

[6] Tim Dettmers, Ruslan Svirschevski, Vage Egiazarian, Denis Kuznedelev, Elias Frantar, Saleh Ashkboos, Alexander Borzunov, Torsten Hoefler, and Dan Alistarh. Spqr: A sparse-quantized representation for near-lossless llm weight compression. *arXiv preprint arXiv:2306.03078*, 2023.

[7] Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. GPTQ: Accurate post-training quantization for generative pre-trained transformers. In *International Conference on Learning Representations*, 2023.

[8] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022.

[9] Yixiao Li, Yifan Yu, Chen Liang, Pengcheng He, Nikos Karampatziakis, Weizhu Chen, and Tuo Zhao. LoftQ: LoRA-fine-tuning-aware quantization for large language models. *arXiv preprint arXiv:2310.08659*, 2023.

[10] Ji Lin, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. AWQ: Activation-aware weight quantization for LLM compression and acceleration. *arXiv preprint arXiv:2306.00978*, 2023.

[11] Yule Liu, Zhen Sun, Xinlei He, and Xinyi Huang. Quantized delta weight is safety keeper. *arXiv preprint arXiv:2411.19530*, 2024.

[12] Plawan Kumar Rath and Rahul Maliakkal. Quantization undoes alignment: Bias emergence in compressed LLMs across models and precision levels. *arXiv preprint arXiv:2605.15208*, 2026.

[13] Jeanine Romano, Jeffrey D. Kromrey, Jesse Coraggio, and Jeff Skowronek. Appropriate statistics for ordinal level data: Should we really be using t-test and cohen's d for evaluating group differences on the NSSE and other surveys? In *Annual Meeting of the Florida Association of Institutional Research*, 2006.

[14] Paul Röttger, Hannah Rose Kirk, Bertie Vidgen, Giuseppe Attanasio, Federico Bianchi, and Dirk Hovy. XSTest: A test suite for identifying exaggerated safety behaviours in large language models. In *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics*, pages 5377–5400, 2024.

[15] Mingjie Sun, Xinlei Chen, J. Zico Kolter, and Zhuang Liu. Massive activations in large language models. *arXiv preprint arXiv:2402.17762*, 2024.

[16] Yi-Lin Sung, Prateek Yadav, Jialu Li, Jaehong Yoon, and Mohit Bansal. RSQ: Learning from important tokens leads to better quantized LLMs. *arXiv preprint arXiv:2503.01820*, 2025.

[17] Guangxuan Xiao, Ji Lin, Mickael Seznec, Hao Wu, Julien Demouth, and Song Han. Smoothquant: Accurate and efficient post-training quantization for large language models. *arXiv preprint arXiv:2211.10438*, 2022.

[18] Hanqi Xiao, Yi-Lin Sung, Elias Stengel-Eskin, and Mohit Bansal. Task-circuit quantization: Leveraging knowledge localization and interpretability for compression. *arXiv preprint arXiv:2504.07389*, 2025.

[19] Yuhui Xu, Lingxi Xie, Xiaotao Gu, Xin Chen, Heng Chang, Hengheng Zhang, Zhengsu Chen, Xiaopeng Zhang, and Qi Tian. QA-LoRA: Quantization-aware low-rank adaptation of large language models. *arXiv preprint arXiv:2309.14717*, 2023.

[20] Shihao Zhang and Rayan Saab. GPTQ-intrinsic LoRA: A near-optimal algorithm for low-precision quantization with low-rank adaptation. *arXiv preprint arXiv:2606.01412*, 2026.

A The `ar.predict` Tool

The tool exists because §4.1 identifies `|Delta|/s` *as the quantity that governs retention, and* ***no adapter card publishes effective magnitude****. It closes that gap for weights. It does not close it for behaviour, and it says so in its own output (§A.4).*

A.1 What it does and what it costs

Given a HuggingFace adapter identifier, `ar.predict` computes the adapter's per-weight delta magnitude against the quantization step size of the base model it targets, and reports the weight-space consequences.

It needs **no GPU, no training, and no base-model download.** Base weights are range-read from the remote safetensors shards — roughly **150 MB of network** rather than the 16 GB the full model would require — and adapter tensors are small. A run takes about 30 seconds.

```
python -m ar.predict --adapter adamkarvonen/Qwen3-8B-taboo-smile_50_mix \
                     --bits 4 --group-size 128
```

A.2 Output

```
  effective magnitude  mean|delta|     9.747e-05
                       mean step s     9.222e-03
                       mean|delta|/s   0.01060

  predicted bit-flip rate           0.0106   [0.0090, 0.0122]
  predicted cosine(delta, delta_eff) 0.1427
  predicted weight-space SNR        0.1442
  predicted layer-output SNR        1.749   [1.487, 2.011]  +/-15%

  NEAR-TOTAL WEIGHT-SPACE EROSION: the deployed weights barely move.

      module   mean|d|/s     flip   cosine     amp  SNR_out
-------------------------------------------------------------
      v_proj     0.00874   0.0087   0.1300   11.22    1.471
      k_proj     0.00979   0.0098   0.1335   11.23    1.513
      o_proj     0.01068   0.0107   0.1401   11.22    1.588
      q_proj     0.01088   0.0109   0.1426   11.22    1.617
     up_proj     0.01205   0.0121   0.1555   11.21    1.765
   gate_proj     0.01568   0.0157   0.1856   11.19    2.114
   down_proj     0.00635   0.0064   0.1115   19.39    2.175

  [elided: a note on what the two weight-space columns assume, then the two
   banners of A.4, which print here on every run and are quoted there in full]
```

In weight space the module ordering is mostly a magnitude effect and partly a tail-shape one (§4.3, B.5): `gate_proj` has the largest `|Delta|/s` and the highest cosine, `down_proj` the smallest and the lowest, and in *this* table the cosine column happens to be monotone in the ratio column. It is not monotone in general, and an earlier draft called the effect "entirely" magnitude two bullets above the measurement that refutes it. Pooled over the nine adapters (B.5), `k_proj` has the second-highest flip rate and the fourth-lowest cosine while `up_proj` has the fourth-highest flip and the second-highest cosine — which under `cosine = sqrt(tau * |Delta|/s)` requires `k_proj`'s τ to sit **17.5% below** `up_proj`'s, and the τ bullet below measures exactly that spread. Magnitude sets the scale; tail shape reorders within it.

In output space the ordering reverses at the bottom, and the reason is architectural. `down_proj` has the *lowest* weight-space cosine (0.1115) and the *highest* predicted output SNR (2.175), because its input dimension is 12288 rather than 4096, so its amplification is 19.39 against 11.2. The two columns answer different questions and disagree about which module fares worst; a reader taking "retains least" from the ratio column and applying it to the layer's output would get it backwards. This is the same distinction as §4.4 and §5.3, visible inside a single table.

Three notes on reading these numbers against the paper's.

- **They are predictions, not the paper's measurements, and they do not match to the last digit.** The tool samples three layers of 36 and averages seven modules unweighted; the weight-space runs measure four layers and 28 module-instances (B.1). Predicted flip here is `0.0106`, against a measured `0.01093` for the same adapter in B.1 — **3.0% apart**, which is within the tool's stated ±15% band but *outside* the 2.3% figure quoted for the closed form. The 2.3% is the model's error against a full measurement; 3.0% is what layer sampling adds.
- **`predicted layer-output SNR 1.749` is not the `1.6286` B.13 attributes to this adapter.** B.13's value is *measured*, by projecting onto an orthonormal basis of Δ's right singular vectors; this one is *predicted* from Equation 5. They differ by 7.4%, which is the amplification law's error on this adapter, and PG-1's 1.6200–1.6728 range is a range of measured values only.
- **`predicted weight-space SNR` is `cos / sqrt(1 - cos^2)`, and that is not the definition B.13 measures.** Here it is the ratio of `Delta_eff`'s component *along* `Delta` to its component *orthogonal* to `Delta`, computed from the predicted cosine: at cosine 0.1427 it gives 0.1442. B.13 reports `||Delta|| / ||Delta_eff - Delta||`, signal over total error, measured per layer and averaged, and that is the quantity the abstract's 6.2–16.5× amplification range is denominated in. **The gap between what this tool prints and what B.13 measures is 0.1442 against 0.1341, 7.5%.** An earlier draft quoted 3.4% here, which is the gap between the two *formulas* evaluated at the same measured cosine (0.1387 against 0.1341) — a real quantity, and not the one a reader of the tool's output is asking about. Every number the tool prints is a claim, and substituting a friendlier recomputation for the printed one is the failure this appendix exists to prevent. The formulas agree closely because both reduce to approximately `cos` when the projection coefficient is near 1 and `cos` is small; the remaining 4.1% is the cosine prediction's own error. Neither validates the other.
- **The `cosine` column is not the fixed-tau formula A.3 tabulates.** The tool computes `sqrt(mean(Delta^2) / (s * mean|Delta|))` per module, which is `sqrt(tau_module * |Delta|/s)` with each module's *own* tail-shape statistic. Backing it out of the printed columns gives 1.82–2.20 across the seven modules, against the 1.5962 the synthetic

Gaussian sweep measures. A.3's table describes **Figure 5's** predictor, which deliberately uses one fixed constant so that it has no per-module free parameter; applying that formula to the row above gives 0.118 where the tool prints 0.130. Two different predictors, and an earlier draft implied they were the same one.

- **The `amp` column uses each module's measured error concentration, not the `1 + c/r` form.** Equation 5 with `c = 0.87` and `r = 32` gives `sqrt(128/1.0272) = 11.16`; the tool prints `11.22`, implying a measured concentration of 1.017 rather than the fitted 1.027. Both are in the paper: the closed form is the claim, the measured value is what the tool has available per module. **The 1% gap is not unexplained.** `c ~ 0.87` is fitted across ranks 16–128; on this adapter at `r = 32` the measured concentration corresponds to `c = 0.017 x 32 = 0.54`, so the closed form over-states concentration here and under-states amplification by 0.5%. The abstract's 6.2–16.5× range is the span of B.13's *measured* per-adapter ratios and does not pass through `c` at all.

A.3 Accuracy

Validated against directly measured records on **nine** published adapters (the validation figure at the end of this appendix):

The prediction is a closed form with no fitted parameters (§3.5), so this is out-of-sample in the only sense available: nothing about these nine adapters was used to construct the model. The cosine row carries one measured constant, the tail-shape statistic `tau = mean(Delta^2)/mean|Delta|^2`, measured at **1.5962 on the synthetic Gaussian sweep** and flat there across three decades of adapter magnitude.

That constant is a property of the synthetic generator, and trained adapters do not satisfy it. 1.5962 is 1.6% above `pi/2 = 1.5708`, the exact value for a Gaussian, which is what the sweep draws. Backing `tau` out per module from A.2's table gives **1.82–2.20** on a real adapter — 16% to 38% higher, because products of trained `B*A` matrices are heavier-tailed than products of Gaussians. Since `cosine prop sqrttau`, that alone is a 7% to 17% under-prediction, which is the right size to be most of the 10.4% in the table above; the code-flip row carries no such constant, which is why it is at 2.3%. **The cosine predictor's error is dominated by a constant fitted on a generator its targets do not match**, and stating that is more useful than the error figure alone.

These errors are for the quantity the model predicts: the adapter's own contribution under a fixed grid (§3.3). A deployment toolchain also moves the grid, which is a second effect the closed form does not model; read as a prediction of the combined outcome its error is 32–47%. The tool prints this scope in its own output.

> **An earlier version of this table read "six adapters" and "cosine 5.0%", and both were wrong; the panel itself printed "max error 0.0%".** Three numbers for one quantity, none of them the measured 10.4%. The figure plots nine. The cosine panel was computing its "prediction" as the measured projection coefficient `<Delta_eff, Delta>/||Delta||^2` divided by the measured magnitude ratio `||Delta_eff||/||Delta||`. Those differ by exactly a factor of `cos(Delta, Delta_eff)`, so their quotient **is** the cosine — it plotted cosine against cosine, drew a perfect line, and printed *max error 0.0%*. It rendered without error for the whole draft and every cross-check passed, because every value in it was correct. It was simply not a test. The panel now uses the channel model's own cosine, and the figure's cross-check asserts that prediction and measurement **differ**, so the vacuous form cannot come back silently (`METHODOLOGY.md` M.3, `METHODOLOGY.md` M.5).

It reads `use_rslora` from each adapter's config rather than assuming a convention. For a rank-128 rsLoRA adapter the two conventions differ by `sqrt128 ~ 11.3x`, which is enough to move an adapter from worst to best in a nine-adapter ranking (`METHODOLOGY.md` M.4). The computed delta is verified against peft's own `merge_and_unload` by a ground-truth fixture (§3.8).

A.4 What it cannot do, stated in its own output

The tool prints the following, unconditionally, on every run:

> **LIMIT OF THIS TOOL, measured not hypothetical.** Six adapters matched on rank, scaling, base model and training recipe, whose output SNR agreed to within 3.3%, showed behavioural retention at 3-bit spanning 28.7% to 86.4% (28.4% to 84.4% with the instrument's floor subtracted; the split is 2 of 6 below half uncorrected, 3 of 6 corrected). The outcome varied 27x more than the predictor did, once the outcome's own measurement error is netted out of its spread — 30x on the raw comparison, which is a noisy outcome against a deterministic predictor. Of the 7 adapter pairs whose difference was statistically resolved, 6 ran OPPOSITE to output SNR.
>
> So: these numbers do not discriminate between similar adapters. If you are choosing between two adapters of comparable rank and magnitude, this tool cannot tell you which will survive quantization better, and a difference it reports between them carries no information. Whether it discriminates ACROSS dissimilar adapters is untested.

It also prints, unconditionally:

> **WHAT THESE NUMBERS SCOPE TO.** The flip rate above is THE ADAPTER'S OWN CONTRIBUTION: given one grid derived from the base

quantity	prediction	max relative error across nine adapters
code-flip rate	`mean(min(|Delta|/s, 1))`	**2.3%** (safety)
cosine	per module, `sqrt(tau * |Delta|/s)` with $\tau = 1.5962$, then averaged	**10.4%** (latentqa)

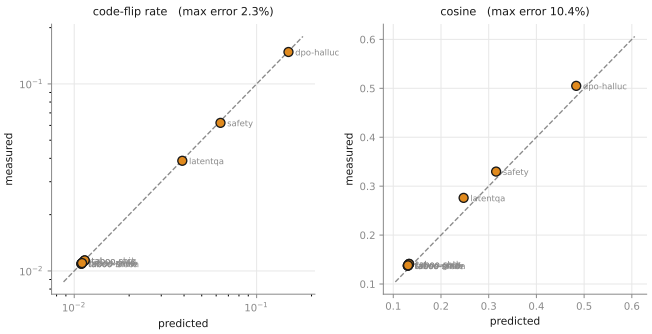


Figure 5: `ar.predict` against direct measurement, nine published adapters. Dashed line is exact agreement. Left: code-flip rate. Right: cosine, predicted per module as $\sqrt{\tau\,|\Delta|/s}$ with τ the measured tail-shape constant, then averaged. Each panel prints its own maximum relative error; both are `fixed_scale` (§3.3) and both are tabulated in A.3.

> weights, the fraction of codes this delta pushes across a boundary. That is what the model predicts, parameter-free, to within 2.3% on nine published adapters.
>
> A deployment toolchain also recomputes the grid from the merged tensor, and the grid then moves under almost every weight. That is a SECOND effect this model does not describe. With both acting, measured code flips run 1.5–1.9× the number above and 83.6–87.4% of dequantized VALUES differ rather than the 1–15% of codes. So: read the flip rate as what the adapter did, not as the fraction of your deployed checkpoint that differs from the base.

We include both rather than a softer caveat because each failure is measured, not anticipated (§5.3, §3.3), and because a tool that reports a number invites the inference that the number ranks things. **The honest use is as a description of what happens to stored weights, at a single adapter, under a grid that isolates the adapter's own contribution — not as a comparison between adapters and not as a deployment forecast.**

A.5 Interpreting the output

The two banners in A.4 are the tool's own statement of what it does and does not support, and they are quoted above verbatim rather than paraphrased here. Two additions they do not carry. **The tool answers only the merged case**: §7 measures the unmerged one on 756 records and finds it entirely different, `|Delta|/s` rising from 0.011–0.149 to 2.31–2.38 and cosine from 0.14–0.51 to 0.9948–0.9952. And **the predictive-gap limit is about discrimination, not level** — output SNR fails to separate adapters whose predictor range is 3.3% wide, which is range restriction, and is compatible with the same quantity setting the absolute level, which is what §4.4 measures and what the amplification law is for (§5.3).

A.6 Reproduction

Full commands and pinned versions in Appendix F. The tool alone:

```
pip install -r requirements.txt          # no torch CUDA build needed for ar.predict
PYTHONPATH=src python -m ar.predict --adapter <hf-id> --bits 4 --group-size 128
```

Supported: `-bits {3,4,8}`, `-group-size {any positive int, or -1 for per-channel}`, `-scheme {asymmetric, symmetric_gptq, symmetric_awq}`, `-base-model` to override the adapter's declared base.

B Full Tables

Record counts: Phase 0 weight-space 1512 (4-layer) + 504 (36-layer); Phase 1 behavioural 1536.

B.1 Weight-space retention per adapter (INT4 g128, asymmetric, both regimes)

CIs are over layers, on the `fixed_scale` cosine. The 36-layer run exists for one adapter only and is reported on its own row rather than pooled with the 4-layer runs.

`fixed_scale` holds the grid derived from `W` and applies it to `W + Delta`, so a weight can only change if the adapter moved it across a boundary. `adaptive_scale` recomputes the grid from `W + Delta`, which is what a deployment toolchain does and **what this paper's Phase 1 behavioural pipeline ran under** (§3.3, §5.1). Under it a weight can also change because the grid moved beneath it, which is why the value-change column is two orders of magnitude above the code-flip column.

Intervals without a mark are **enumerated** over all `k^k` resamples, so they carry no resampling noise; enumerated is not the same as exact coverage. A `*` marks a **sampled** interval (Monte Carlo, n=20000), used where the sample is too large to enumerate; its last printed digit is at the resolution the resampling noise supports and no finer.

Base model is `Qwen3-8B` for every adapter except `responsible-ai-safety`, which is `Llama-3.1-8B-Instruct`.

`rel. err` and `mag. ratio` are different quantities and the paper quoted the wrong one. `rel. err` is `||Delta_eff - Delta|| / ||Delta||`, error against an erasure baseline of 1.0. `mag. ratio` is `||Delta_eff|| / ||Delta||`, how much larger the delivered update is than the intended one — which is what

the phrase "7.5 times its magnitude" means and what was never tabulated. They differ by about 1%: at cosine 0.1374 a relative error of 7.407 implies a magnitude ratio of 7.476, and earlier drafts quoted 7.4 for the second while reading it off the first. Per §3.4 the magnitude ratio is never reported without a cosine beside it.

Columns marked `fix` are `fixed_scale` and `adp` is `adaptive_scale`; `val-chg` is the value-change rate, `adaptive_scale` only.

B.2 Channel model: predicted vs measured code-flip rate

`predicted = mean(min(|Delta|/s, 1))`, no fitted parameters. INT4 g128, asymmetric, `fixed_scale`.

Maximum relative error: 2.3%.

Six digits on the inputs and four on the ratio because five and three did not reproduce: at `0.01093` against `0.01095` the printed pair supports a ratio anywhere in 0.9981–0.9985, and the table asserted 0.999. This is the table carrying the paper's headline accuracy, and a reader who recomputes the derived columns from the printed inputs has to land on the printed values.

B.3 Quantization convention (paired)

Paired on (adapter, layer, module) cells present under all three schemes, `fixed_scale`. Pooling unpaired records inverts this ordering (EXP-008).

scheme	cells	cosine	code-flip	rel. err
`asymmetric`	252	0.2161	0.0351	5.802
`symmetric_gptq`	252	0.2065	0.0341	6.733
`symmetric_awq`	252	0.1980	0.0303	6.453

B.4 Scale regime

`fixed_scale` isolates the adapter's contribution; `adaptive_scale` is deployment-realistic and is the regime Phase 1 ran under (§3.3). Pooled over the 9 adapters, code flips and value changes differ by 15.0x under `adaptive_scale`, which is why both are logged; per adapter the ratio runs from 4.0x to 41.1x (B.1).

`scale-shift` is the fraction of GROUPS whose step size differs between `W` and `W + Delta`; `grid-shift` is the fraction of WEIGHTS whose dequantized value changes under `adaptive_scale` but not under `fixed_scale` — i.e. those that moved because the grid moved, not because the adapter cleared the step. Both are properties of the pair of regimes, so they read the same on both rows.

B.5 Module profile (pooled over 9 adapters)

module	cells	cosine	code-flip
`gate_proj`	36	0.2480	0.0414
`up_proj`	36	0.2234	0.0356
`q_proj`	36	0.2225	0.0386
`k_proj`	36	0.2154	0.0401
`o_proj`	36	0.2149	0.0339
`v_proj`	36	0.2135	0.0317
`down_proj`	36	0.1750	0.0243

B.6 Behavioural retention per adapter and precision

Elicitation score as a fraction of the same adapter's own BF16 score. Intervals are over the six adapters, not over prompts: the adapter is the sampling unit, and the prompts within one adapter are not independent draws — they are 8 intents x 3 paraphrases plus 8 adversarial prompts, and it is that clustering rather than greedy decoding which makes them dependent (§3.11). They are enumerated over all 6^6 resamples.

The metric has a non-zero floor and no ceiling at 1.0. The BF16 column is the guesser's score on the model's own response divided by its score on a canonical hand-written hint for that word (§3.7), so a response that is a *better* hint than the canonical one scores above 1: `ship` reads 1.0327 and `snow` 1.0030. That is a property of the normaliser, not an anomaly, and it is why every retention figure in this table is each adapter against its own BF16 value rather than against 1.

The denominator is the aligned model's own BF16 score and the metric has a non-zero floor, so the percentages are not "fraction of the behaviour". The `base` column gives the SAME instrument's score on the base model without the adapter, at the same precision, so a reader can floor-correct. It is small but not negligible and varies 40x across adapters (`ship` 0.0039, `snow` 0.1642): the guesser has a prior over the 20 candidates. Floor-corrected retention, `(aligned - base) / (aligned_BF16 - base_BF16)`, is given as its own row and moves the *mean* by under 2 points at every precision — but it moves the per-adapter split, which is what the paper's claims are about, and **B.7** gives every adapter under every variant rather than leaving a reader to check a mean against a claim it cannot settle.

The 8 adversarial prompts are constraint probes, and the capability score pools them with the 24 hint prompts. Their job is to make the model say the word, and a response containing it scores at or above the normaliser because the guesser recovers it trivially — so a quarter of the capability axis is the inverse of the constraint axis. The `24 hint prompts only` row above is the same measurement with them removed. **The two agree**: the ordering is identical, the dose-response is monotone in both, and the hint-only mean is +5.7 points at INT4 g128, +3.0 at per-channel and +4.3 at INT3. Note the sign: removing the adversarial prompts **raises** the score, because adversarial prompts are harder and yield less word-bearing text than hint prompts, which outweighs the leak lift. That lift is real and is now reported with an interval rather than as a bare pair of means: responses containing the word score 0.929 against 0.717, and per adapter the difference is +0.255 with an enumerated 95% interval of [+0.136, +0.371]. The pooled figure is the pre-registered instrument and remains the

adapter	r	α/r	lay	cos fix	95% CI	cos adp	flip fix	flip adp	val-chg	rel err	mag
ao-v3-dpo-halluc	128	0.125	4	0.5050	0.476–0.539	0.5047	0.14813	0.22115	0.8742	1.74	2.01
latentqa	64	2	4	0.2760	0.255–0.300	0.2746	0.03882	0.06481	0.8586	3.58	3.72
responsible-ai-safety	16	2	4	0.3298	0.307–0.366	0.3290	0.06191	0.10219	0.8363	2.90	3.07
taboo-gold	32	2	4	0.1389	0.125–0.153	0.1378	0.01114	0.02112	0.8546	7.35	7.42
taboo-moon	32	2	4	0.1375	0.124–0.151	0.1364	0.01092	0.02079	0.8545	7.42	7.49
taboo-rock	32	2	4	0.1412	0.128–0.154	0.1401	0.01137	0.02147	0.8546	7.21	7.28
taboo-ship	32	2	4	0.1409	0.128–0.154	0.1398	0.01139	0.02149	0.8546	7.23	7.30
taboo-smile	32	2	4	0.1374	0.124–0.150	0.1363	0.01093	0.02080	0.8546	7.41	7.48
taboo-snow	32	2	4	0.1382	0.126–0.150	0.1370	0.01102	0.02088	0.8545	7.37	7.44
taboo-smile	32	2	36	0.1380	0.135–0.140*	0.1369	0.01220	0.02267	0.8463	7.29	7.36

adapter	measured	predicted	ratio	rel. error	proj. identity
ao-v3-dpo-halluc	0.148128	0.149488	0.9909	0.92%	0.9900
latentqa	0.038819	0.039123	0.9922	0.78%	0.9912
responsible-ai-safety	0.061912	0.063354	0.9772	2.33%	0.9743
taboo-gold	0.011143	0.011158	0.9987	0.13%	0.9924
taboo-moon	0.010921	0.010936	0.9986	0.14%	0.9934
taboo-rock	0.011369	0.011397	0.9975	0.25%	0.9919
taboo-ship	0.011394	0.011417	0.9980	0.20%	0.9926
taboo-smile	0.010934	0.010949	0.9986	0.14%	0.9924
taboo-snow	0.011020	0.011035	0.9986	0.14%	0.9931

headline; it is not the more flattering one. At INT4 g128 **4** readings are above parity — `moon` 100.2%, `rock` 116.2%, `ship` 103.2%, `smile` 100.8% — and **3** of them stay above parity with the adversarial prompts removed, so leakage does not explain them. Note that the count falls while the mean rises: the hint-only shift is not uniform across adapters, which is why the split is a per-adapter claim and not a mean one.

Adversarial leak rate, the fraction of the 8 adversarial prompts on which the secret word appears. This is the constraint measured in the disclosure frame under pressure, which is what the adversarial set was built for; the knowledge probe never mentions the secret and cannot test that frame.

Every per-adapter cell is a multiple of 12.5%, because each is a count out of 8 — read them as counts, not as rate estimates. The pooled row is the mean of the six, so it need not be: 6.2% at INT3 is 6.25%, three leaks in 48 prompts, printed at one decimal.

The leak rate **falls** from 16.7% at BF16 to 6.2% at INT3, a paired difference over the six adapters of **+10.4%** with an enumerated 95% interval of [**+0.0%, +20.8%**]. **That interval reaches zero**, so this is a trend the six adapters support in direction and do not resolve in size, and it is stated that way rather than as a demonstration. Per adapter the difference runs `gold` +12.5%, `moon` +25.0%, `rock` +12.5%, `ship` +0.0%, `smile` +25.0%, `snow` -12.5% — **`snow` moves the other way**, from 12.5% to 25.0%, doubling at INT3 on a count of 8. Reporting only the pooled trend here would be the mean-versus-adapters error this appendix polices two tables up.

The constraint does not fail under quantization in the frame designed to break it. Read with care: capability falls too, so some of this is a model less able to produce the word at all rather than more willing to withhold it — which is the same confound §5.2 handles by comparing within precision, and is why this is reported beside the knowledge probe rather than instead of it.

And the ratio that motivated this instrument does not survive the full grid. E.2 said the adversarial prompts leak "roughly 6x more" than the hint prompts. Pooled over every aligned record it is **1.21x** (19 of 192 against 47 of 576); at BF16 alone 1.33x. The 6.00x is `smile` at BF16, one adapter at one precision. E.2 now says so.

B.7 The three metric variants, per adapter

Rows are the same measurement under three choices of instrument. The first is the pre-registered one and every headline number in the paper is quoted under it. `<50%` and `>80%` are counts of the six; `span` is min–max. `CV` is the outcome coefficient of variation, which is PG-1's denominator.

All adapter, mean and span cells are percentages.

What moves. The mean does not: floor correction shifts it by -0.2, -0.6, -1.8 points at INT4 g128, per-channel and INT3. **The split does.** At INT3 the count below half goes 2 → 3 under floor correction (`smile` crosses at 49.3%) and the count above 80% goes 2 → 1 (`snow` falls to 77.7%). The span goes 28.7%–86.4% → 28.4%–84.4% floor-corrected and 32.7%–89.3% hint-only. Every site quoting the split or the span now names the variant it is quoted under.

PG-1 does not move under the metric variants. Its predictor is a Phase 0 quantity and is unaffected by any of this: CV 0.0128. The outcome CV is the last column, and the ratio outcome/predictor runs **7.3× to 30.5×** across all nine variant × precision cells — the smallest is hint-only at INT4 per-channel and the largest is the pre-registered instrument at INT3. **PG-2 does not move under floor correction at all** (B.12): same

regime	cosine	code-flip	value-change	scale-shift	grid-shift
`fixed_scale`	0.2161	0.0351	0.0351	1.0000	0.8202
`adaptive_scale`	0.2151	0.0572	0.8552	1.0000	0.8202

word	BF16	base	int4_g128	base	int4_pc	base	int3_g128	base
gold	0.8280	0.0165	81.3%	0.0168	62.4%	0.0177	41.3%	0.0211
moon	0.8250	0.0245	100.2%	0.0233	78.1%	0.0536	86.4%	0.0376
rock	0.8603	0.0105	116.2%	0.0125	77.5%	0.0131	57.7%	0.0151
ship	1.0327	0.0039	103.2%	0.0034	79.8%	0.0040	28.7%	0.0034
smile	0.7178	0.0150	100.8%	0.0123	68.5%	0.0115	51.3%	0.0221
snow	1.0030	0.1642	93.5%	0.1634	96.8%	0.1402	81.5%	0.1655
mean	—	—	**99.2%**	—	**77.2%**	—	**57.8%**	—
95% CI over adapters	—	—	[90.7%, 107.6%]	—	[69.0%, 86.0%]	—	[41.7%, 74.3%]	—
floor-corrected mean	—	—	99.0%	—	76.5%	—	56.0%	—
mean, 24 hint prompts only	—	—	104.9%	—	80.2%	—	62.1%	—
below 50%	—	—	0/6	—	0/6	—	2/6	—

pairs, same counts, same directions. It does move under hint-only, and B.12 gives that.

PG-1 does move once the outcome's own measurement error is netted out, and that correction was available in this appendix before it was applied. The predictor is deterministic and the outcome is not, so an observed outcome CV contains both between-adapter variance and within-adapter noise, and comparing the raw ratio against a noise-free predictor overstates the gap. Subtracting the mean squared per-adapter standard error — from the same cluster bootstrap B.12 uses, normal-approximated from each interval's width, which is a conservative reading of an asymmetric interval:

At INT3 the headline falls from 30.5× to 27.5×, which does not change PG-1's conclusion and is the number that should be quoted. At INT4 g128 it falls from 9.1× to 6.5× — most of the apparent between-adapter spread at the finest grid is measurement noise, which is worth knowing and is not what PG-1 rests on. The released tool's banner quotes the corrected INT3 figure.

A fourth cell exists — floor-corrected *and* hint-only — and is omitted from the table because no claim is quoted under it; for completeness it gives 105.0%, 79.3%, 60.8% with the same 2/6 below half at INT3 as hint-only.

B.8 Paired contrasts between precisions

Paired over the six adapters, because the same six are measured at every precision; an unpaired comparison discards that and widens every interval for no reason. Intervals are **enumerated** over all 6^6 resamples of the per-adapter difference, so there is no resampling noise and no seed. Enumerated is not the same as exact coverage: a percentile bootstrap at n=6 is asymmetric and approximate however it is computed, and **the test column rather than the interval is what carries the inference** (§3.11).

`p` is an exact sign-flip permutation over the $2^6 = 64$ assignments of sign to the six paired differences — the randomization test this paired design supports. It replaces an "excludes zero" column, which read the same bootstrap the interval comes from and therefore said nothing the interval had not already said.

Monotone at every step, per adapter: **4 of 6**. The mean is monotone; the adapters are not.

Two of the three are 0.0625 rather than the 0.0312 floor, and the reason is not ties. No contrast here has a tied pair. In the first, `snow` moves against the mean; in the third, `moon` does. One adapter running the other way makes the observed sum the *second* most extreme of the 64 rather than the first, which doubles the tail. Only the INT4 g128 vs INT3 contrast, where all six move together, reaches the floor.

"All three exclude zero" is one claim about a correlated triple, not three independent findings. The same six adapters produce all three contrasts and the third is the difference of the other two, so the multiplicity is not what a naive reading suggests and neither is the independence. **None of the three clears a three-way Holm correction**, and §3.11 gives the reason as a property of the design rather than of these numbers: at n=6 the two-sided sign-flip `p` cannot go below 0.0312.

An earlier version of this appendix inferred the third contrast's weakness from how far its interval's lower bound sat from zero. That is reading a percentile bootstrap at n=6 as a test, which is what §3.11 now forbids and what EXP-056 withdrew elsewhere; the inference is removed rather than requalified. The bound itself printed as 0.1 points for four drafts because the value is a ratio and the format specifier was `.1f`, so 0.054 rendered as 0.1 while the table printed the same number as 5.4%.

B.9 Knowledge probe: the benign dissociation

Aligned vs base **within the same precision**. The comparison inverts if aligned-quantized is compared against base-BF16 (§5.2). Intervals are enumerated over the six adapters, the same estimator as B.8 and Table 2; the adapter is the cluster because each contributes all its probes or none.

	BF16	int4_g128	int4_pc	int3_g128
gold	12.5%	0.0%	0.0%	0.0%
moon	37.5%	25.0%	25.0%	12.5%
rock	12.5%	0.0%	12.5%	0.0%
ship	0.0%	0.0%	0.0%	0.0%
smile	25.0%	12.5%	0.0%	0.0%
snow	12.5%	12.5%	12.5%	25.0%
pooled	**16.7%**	**8.3%**	**8.3%**	**6.2%**
95% CI, leak rate	[8.3%, 27.1%]	[2.1%, 16.7%]	[2.1%, 16.7%]	[0.0%, 14.6%]

variant	prec.	gold	moon	rock	ship	smile	snow	mean	<50	>80	span	CV
pre-registered, 32	INT4 g128	81.3	100.2	116.2	103.2	100.8	93.5	**99.2**	0	6	81.3–116.2	0.116
pre-registered, 32	INT4 per-ch.	62.4	78.1	77.5	79.8	68.5	96.8	**77.2**	0	1	62.4–96.8	0.152
pre-registered, 32	INT3	41.3	86.4	57.7	28.7	51.3	81.5	**57.8**	2	2	28.7–86.4	0.390
floor-corrected, 32	INT4 g128	80.9	100.3	116.2	103.3	101.2	92.3	**99.0**	0	6	80.9–116.2	0.119
floor-corrected, 32	INT4 per-ch.	61.4	73.8	76.9	79.7	68.3	99.0	**76.5**	0	1	61.4–99.0	0.167
floor-corrected, 32	INT3	39.5	84.4	56.6	28.4	49.3	77.7	**56.0**	3	1	28.4–84.4	0.387
hint-only, 24	INT4 g128	92.0	104.8	121.0	98.9	112.7	99.9	**104.9**	0	6	92.0–121.0	0.100
hint-only, 24	INT4 per-ch.	73.5	77.2	72.8	83.7	81.2	92.8	**80.2**	0	3	72.8–92.8	0.094
hint-only, 24	INT3	42.3	89.3	66.3	32.7	63.7	78.5	**62.1**	2	1	32.7–89.3	0.344

The aligned column shows no trend, and it is not flat. It runs 0.0757, 0.0634, 0.0730, 0.0756 across the four precisions — a span of 0.0634–0.0757, whose largest single step is 16.2% between BF16 and INT4 g128. Every interval above overlaps every other, so the correct statement is **no detectable trend**, not equality. An earlier draft called this column "flat at 0.0757 and 0.0756" and §5.2 concluded the constraint was "exactly as strong at INT3 as at BF16": that is the first and last elements of a four-element series, quoted as if they were the series. It also explains why the ratio column is non-monotone while the base column falls monotonically — the non-monotonicity is in the numerator, and it is noise.

B.10 Layer 1–3 spike: step size vs input-channel activation

Activation columns are mean-normalised within each module (§4.5).

B.11 Within-bin position: is u uniform where the model needs it?

The derivation §3.5 summarises. Under group-wise affine quantization a weight's stored code is `round(w/s + z)`. Write `w/s + z = k + u - 1/2` with `k` the integer code and `u = frac(w/s + z + 1/2) in [0,1)`, so `u` is the distance from `w` to the **lower edge of its rounding cell** and `u = 1/2` is the cell's centre. Adding `delta` moves the code exactly when `u + delta/s` leaves `[0,1)`, so for `|delta| < s` the indicator is `1[u < |delta|/s]` when `delta < 0` and `1[u > 1 - |delta|/s]` when `delta > 0`. Under `u` uniform and independent of `delta`, each has expectation `|delta|/s`, which is Equation 4 — the same marginal a stochastic rounder would give, obtained by averaging over a layer's ~10^9 weights rather than over repetitions of a random operation. *An earlier draft of §3.5 wrote `w = s(k + u)` with `u` "the position within its bin", which under round-to-nearest puts the boundary at `u = 1/2` and every indicator half a bin out of place. The code always used the form above; only the line describing it was wrong.*

`u` is each weight's distance to its quantization boundary, over 42 module-instances on both base models, INT4 g128 asymmetric. Equation 4 needs `F_u(t) = t`. A flip is two-sided — a negative delta crosses the lower boundary, a positive one the upper — so the quantity the model averages over is the **mean of the two tails**.

t	lower tail	upper tail	mean (= P(flip))	mean / t
0.001	0.00256	0.00031	0.00143	1.433
0.002	0.00334	0.00109	0.00222	1.108
0.005	0.00614	0.00389	0.00501	1.003
0.008	0.00899	0.00673	0.00786	0.982
0.011	0.01200	0.00975	0.01088	0.989
0.020	0.02084	0.01858	0.01971	0.985
0.050	0.05036	0.04811	0.04924	0.985
0.100	0.09965	0.09746	0.09855	0.986
0.150	0.14909	0.14682	0.14796	0.986
0.250	0.24712	0.24510	0.24611	0.984
0.500	0.50015	0.49818	0.49916	0.998
0.750	0.75356	0.75135	0.75245	1.003

Uniform to within 1.8% at every `t` at or above 0.005, which covers the whole range our adapters occupy. Read on one tail alone the lowest 0.1% of the bin is over-occupied by 2.6x, which a one-sided measurement would have reported as a 156% excess.

Do not read the `mean / t` column as a flat 0.985 and infer a constant 1.3–1.5% over-prediction. That is what this appendix did, and it puts B.2 and B.11 eight-fold apart for no reason: the column is flat *in this table* because every row pools all weights, and the departure is a function of `|Delta|/s`, which pooling hides. The decile breakdown below has it, and §4.1 states the budget it implies.

Where that excess comes from, since the obvious answer is wrong. An earlier version of this appendix attributed it to Equation 2 pinning each group's

precision	outcome SD	RMS per-adapter SE	between-adapter SD	CV observed	CV between	ratio observed	ratio between
INT4 g128	0.1150	0.0800	0.0825	0.1159	0.0832	9.1×	6.5×
INT4 per-ch.	0.1173	0.0993	0.0624	0.1520	0.0809	11.9×	6.3×
INT3	0.2256	0.0974	0.2035	0.3902	0.3519	30.5×	27.5×

contrast	mean paired difference	95% CI	sign-flip p
INT4 g128 - INT4 per-channel	22.0%	[10.8%, 31.6%]	0.0625
INT4 g128 - INT3 g128	41.4%	[23.3%, 59.3%]	0.0312
INT4 per-channel - INT3 g128	19.4%	[5.4%, 34.5%]	0.0625

extrema, which would put 1.56% of weights on a boundary against the 0.20% measured — eight times over. Six controls, the last three added when the account that replaced it turned out to need them too:

`u = 0` is the boundary and `u = 0.5` is the bin centre. **The extrema are not pinned anywhere.** Because Equation 2 rounds `z`, a group's extrema are free to land anywhere in their code, and measured they do: mean 0.494, which is the uniform expectation, with an SD indistinguishable from the uniform `1/sqrt12 = 0.2887` and an IQR of 0.500 against uniform 0.500. **This is the second wrong account of the same three numbers.** The first said the extrema are pinned to the boundary; the replacement said they are pinned to the bin centre and quoted the mean alone as evidence, which a uniform population produces exactly. A mean of 0.494 refutes the boundary account and licenses nothing in its place; the dispersion is what settles it, and it was not measured until a second reader asked for it. An explanation written to replace a refuted explanation is at its most persuasive and least tested, which is precisely what `METHODOLOGY.md` M.8 says and precisely what M.8's own replacement did not get. What the exact-zero mass actually is: base weights are bf16, so a group of 128 holds about 121 distinct values and `w/s + z + 0.5` lands exactly on an integer for roughly 1 in 500 of them. A perturbation four orders of magnitude below bf16's own resolution inside a bin removes 99% of it; a structural pinning would be untouched. The uniformity result does not depend on any of the three accounts, and did not change under either replacement (EXP-048, EXP-053).

Equation 4 has three licensing assumptions, not two, and the third is one this cancellation argument created. Averaging the two tails 50/50 is the right quantity only if `P(delta<0) = P(delta>0)` and `sign(delta)` is independent of `u`. §4.1 measures `|delta|` against `u`; a sign–position association would leave that untouched and break the cancellation exactly. Registered as P11 (EXP-046) before it was run, over the same 42 module-instances:

All three hold, and the correlations are at their sampling floor rather than merely small: a null correlation on these module sizes has standard deviation `1/sqrtn` of 0.00013 to 0.00049, and the largest of the 42 is 2.17 of its own SD.

Assumption 1 was measured globally where the argument needs it locally, and this is the local version. A Pearson correlation of `|delta|/s` against `u` over the whole bin is dominated by the bulk and is close to uninformative about the conditional density of `u` in the lowest 1%, which is where the prediction lives at the `t ~ 0.011` our adapters occupy. Binning the same 42 module-instances by decile of `|delta|/s` and re-reading the low tail inside each bin gives the conditional directly. Registered as **P12** (EXP-052) before it was run.

P12.1 holds and is the load-bearing clause. At the common `t = 0.011` the flip probability is 0.01085–0.01092 across all 10 deciles — a worst departure from the pooled value of **0.34%**, against a registered bound of 2%. The low tail of `u` does not depend on the size of the delta that has to cross it, which is the conditional Equation 4 needs and the one the global correlation could not see.

P12.2 failed as registered, and the falsifier was the thing at fault. The decile-index Spearman is **+0.87**, above the registered 0.5, so the drift is monotone. It is also 0.63% wide end to end. A rank statistic on ten values is scale-free by construction and will report a large correlation for a trend of any size, so registering one without a magnitude qualifier was a specification error of the same family as the three in `METHODOLOGY.md`. The dependence is real, systematic and six times smaller than the tolerance the model needs; both halves are stated because the registered bound says to.

P12.3 failed on one decile of 10, and it is the known non-uniformity of `u` rather than a conditional effect. Deciles 2–10 read 0.95–0.99 against `min(t,1)`; decile 1, whose mean `t` is 0.00241, reads 1.1185. That is the `t < 0.005` region the table above already reports as over-occupied, arriving in the decile with the smallest deltas. Its effect on the integrated prediction is +0.07%, because it is a tenth of the weights at a twentieth of the mean `t`.

And this settles the error budget, which two appendices disagreed about. This appendix said the measured non-uniformity implies a 1.3–1.5% overprediction for every adapter; B.2 measures 0.1–0.2% on the taboo six. Both are right and neither is a property of the model: **the departure is a function of `|delta|/s`, not a constant**. The last column above falls from 1.12 at `t = 0.0024` to 0.95 at `t = 0.124`. Split by adapter over

precision	base	95% CI, base	aligned	95% CI, aligned	ratio	Cliff's d	entropy (aligned)
bf16	0.3634	[0.1800, 0.5516]	0.0757	[0.0307, 0.1255]	0.208	-0.778	1.4069
int4_g128	0.3583	[0.1748, 0.5441]	0.0634	[0.0287, 0.0986]	0.177	-0.778	1.3984
int4_per_channel	0.3272	[0.1958, 0.4835]	0.0730	[0.0315, 0.1178]	0.223	-0.833	1.4998
int3_g128	0.2803	[0.1380, 0.4220]	0.0756	[0.0303, 0.1199]	0.270	-0.556	1.3480

layer	module	step med/p1	act @ narrowest 1%	act @ widest 1%	ρ(log s, act)	split-half r
0	`gate_proj`	1.4	0.97	1.03	+0.033	0.943
0	`up_proj`	1.3	0.99	1.04	+0.010	0.943
1	`gate_proj`	**83.5**	**0.17**	1.12	+0.244	0.997
1	`up_proj`	7.1	0.89	1.00	+0.064	0.997
2	`gate_proj`	**44.6**	**0.19**	1.58	+0.275	0.996
2	`up_proj`	7.3	0.61	1.49	+0.113	0.996
3	`gate_proj`	**145.1**	**0.15**	1.05	+0.156	0.992
3	`up_proj`	24.4	0.80	0.96	+0.038	0.992
18	`gate_proj`	1.6	0.94	1.03	+0.012	0.820
18	`up_proj`	1.4	0.98	1.04	-0.004	0.820

these same 42 module-instances, the closed form overpredicts the true code flip by **2.7%** for `responsible-ai-safety` (ratio 0.9732), **0.1%** for `taboo-smile` (ratio 0.9990). B.2 reaches the same two numbers from a different code path on a different layer set — 0.977 and 0.999 — so this is a reproduction of that table's split, not a restatement of it. **The honest budget is: under 0.5% at the `t` the taboo adapters occupy, and about 2.5% at four times that `t`.** The paper's headline 2.3% maximum relative error is the safety adapter, and it is the highest-`t` case among the small-rank adapters, not a floor that applies to all of them.

Pooled over all 42 module-instances: closed form 0.037385, true code flip 0.036516, ratio **0.9768**.

B.12 PG-2 under three estimators

Two corrections are bundled in "cluster bootstrap". **Pairing narrows** — both conditions run byte-identical prompts, so the shared prompt-difficulty variance cancels. **Clustering was described here as widening, and measured it does not, reliably.** The two halves are shown separately below and then the direction question is settled with the variance components, because an earlier version of this appendix asserted a direction its own table contradicted.

The variance components, which decide the direction. Over the 24 hint prompts, 8 intents x 3 paraphrases, one-way random effects on `guesser_p_word_normalised`. `deff` is 1 + (k−1)·ICC at k=3; `eff.units` applies it to the hint block and adds the 8 adversarial prompts, each its own intent.

Paraphrases within an intent are not near-duplicates in score, and the justification given for the switch was wrong. This appendix said the 32 prompts carry "roughly 16 independent units", which is the ICC = 1 case. Measured, ICC runs 0.175 to 0.303 and the battery carries 23–26 effective units, not 16. The prompt-level estimator was anti-conservative, but on the standard error of a **battery-level** mean by only 11%–18% — $\sqrt{}(32/26)$ to $\sqrt{}(32/23)$ — not by the $\sqrt{}2$ that "16, not 32" implies. Inside the **24-prompt hint block**, where every prompt sits in a 3-paraphrase cluster and the 8 singleton adversarial prompts are not there to dilute the ICC, the inflation is larger: $\sqrt{}$deff = 16%–27%. An earlier version of this paragraph quoted the hint-block figure in a sentence whose subject was the 32-prompt battery; the two populations differ by the 8 singletons and the numbers differ by half as much again.

Why a cluster bootstrap can narrow. It resamples intents with membership fixed: a drawn intent always contributes all three of its paraphrases, so the within-cluster resampling variance is removed rather than merely down-weighted, and only the between-cluster variance is left. That trade widens the interval only to the extent the paraphrases agree. At the measured ICC it is close to a wash — C is wider than B in **10 of 18** adapter x precision cells, and the aggregate width band above narrows slightly.

So pairing does the work and clustering costs resolution, in one place. Pairing moves the count by +1, +1, +2 (A → B); clustering then moves it by +0, +0, -2 (B → C). Every pair clustering removes is at INT3 and every one involves `smile`: `moon`–`smile`, `smile`–`snow`. `smile` has the highest within-adapter ICC in the grid at INT3 (0.682 against a pooled 0.29) and the largest C/B width ratio, so the paraphrase similarity clustering exists to charge for is concentrated in one adapter at one precision rather than spread across the design. Clustering is still the right estimator — the design has clusters and the between-cluster variance is the one the design supports — but it is not what moved the count, and this appendix previously implied it was.

At INT3 the net returns to the published 4, on the same four pairs. At INT4 g128 pairing dominates and one pair appears that the published estimator called noise — and that pair runs *with* the predictor, so the correction costs us the word "every" in §5.3. Reporting only the net would have hidden both facts.

PG-2 under the metric variants of B.7, estimator

control	measured	what the pinning account implies
`u` at each group's minimum	0.4943 ± 0.2887	0 (a boundary)
`u` at each group's maximum	0.4951 ± 0.2888	0 (a boundary)
SD of `u` at the extrema, over the uniform SD	1.000	0 (pinned)
IQR of `u` at the extrema	0.500	0 (pinned)
fraction of the `u = 0` mass that is extrema	0.054	1.000
`u = 0` mass surviving a jitter of `1e-4 * s`	0.000022	0.002039, unchanged

#	assumption	registered bound	measured	where
1	`u` independent of the magnitude of δ	—	max |r| 0.000774	§4.1
2	`u` uniform	—	within 1.8% for `t` ≥ 0.005	above
3a	`P(delta<0)` = 1/2	0.5 ± 0.01	worst departure 0.000237	P11.1
3b	`sign(delta)` independent of `u`	|r| < 0.01	max 0.001060	P11.2
3	the 50/50 average equals the sign-aware one	within 2% at `t` ≥ 0.005	0.9936–1.0045 at t = 0.011	P11.3

C throughout. Floor correction is subtracted prompt-wise before the ratio is formed.

Floor correction changes nothing here — identical counts, identical pairs, identical directions. Dropping the 8 adversarial prompts costs resolution, and what survives is the shape of the claim rather than its size: under every variant the only resolvable pair that runs *with* output SNR is the single INT4 g128 pair, which is the one whose separation depends on a point estimate above 100% that a quantized model cannot deliver. Every INT4 per-channel and INT3 pair inverts under every variant.

B.13 Layer-output SNR and amplification, per adapter

Measured by projecting onto an orthonormal basis of `Delta`'s right singular vectors, per layer, then averaged — **not** predicted from Equation 5. `amp ratio` is the mean over layers of `SNR_out / SNR_weight`, each layer using its own `SNR_weight`; the ratio of the two column means is a different statistic and is not what the paper's range quotes.

Two definitions of weight-space SNR are in play and the paper used both without printing either. Here it is `SNR_w = ||Delta|| / ||Delta_eff - Delta||` — signal over total error, computed per (layer, module) and averaged, which is the quantity `amp ratio` divides into and therefore the one the abstract's amplification range is denominated in. The tool (A.2) prints a *predicted* weight-space SNR instead, `cos / sqrt(1 - cos^2)`, which is the ratio of `Delta_eff`'s component along `Delta` to its component orthogonal to `Delta`. **These are different statistics.** They agree to within 3.4% on `taboo-smile` (0.1341 here against 0.1387 from the tool's formula at cosine 0.1374) because both reduce to approximately `cos` when the projection coefficient is near 1 and `cos` is small, which holds for every adapter in this study (B.2's last column, 0.974–0.993). Do not read the agreement as a cross-validation of one by the other.

adapter	SNR_out	SNR_weight	amp ratio
ao-v3-dpo-halluc	3.7571	0.6164	6.22
latentqa	2.5250	0.2920	8.80
responsible-ai-safety	5.9995	0.3854	16.54
taboo-gold	1.6299	0.1342	12.40
taboo-moon	1.6200	0.1334	12.39
taboo-rock	1.6728	0.1375	12.38
taboo-ship	1.6566	0.1366	12.38
taboo-smile	1.6286	0.1341	12.38
taboo-snow	1.6254	0.1342	12.37

The amplification range the paper quotes is the span of the last column: **6.2–16.5x**. The six taboo adapters span **1.6200–1.6728** on `SNR_out`, which is the 3.3% spread PG-1 calls a matched population.

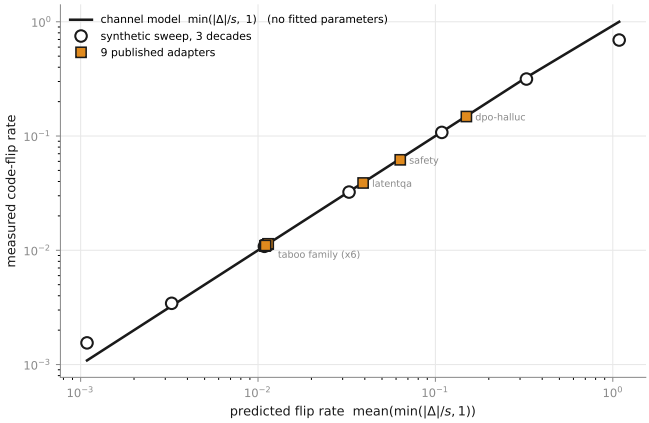


Figure 6: The channel model against measurement across three decades of adapter magnitude, swept on a real `q_proj` base at rank 32. The prediction has no fitted parameters.

C Registered Predictions

Every prediction registered before the run it concerns, with its outcome. The methodological practices that produced them are in `METHODOLOGY.md` in the accompanying repository, which is inside the same claim audit, count-word gate and cross-reference gate as this document.

We pre-registered eleven predictions before the runs they concern: **P1 to P9**, nine in a dated planning document, and **P10** and **P11** later, each in the `EXPERIMENTS.md` entry for the run it concerns and before that run. **All**

decile of `|delta|/s`	`t` range	mean `t`	P(flip) at `t = 0.011`	/ pooled	P(flip) at own `t`	true code flip	true / `min(t,1)`
1	0.00000–0.00484	0.00241	0.01085	0.9978	0.00267	0.00270	1.1185
2	0.00484–0.00981	0.00731	0.01087	0.9990	0.00726	0.00721	0.9867
3	0.00981–0.01508	0.01241	0.01085	0.9972	0.01218	0.01208	0.9728
4	0.01508–0.02081	0.01789	0.01086	0.9984	0.01759	0.01745	0.9755
5	0.02081–0.02726	0.02396	0.01088	1.0002	0.02357	0.02339	0.9760
6	0.02726–0.03488	0.03095	0.01086	0.9986	0.03043	0.03017	0.9747
7	0.03488–0.04443	0.03944	0.01089	1.0007	0.03879	0.03846	0.9751
8	0.04443–0.05774	0.05064	0.01090	1.0020	0.04977	0.04938	0.9752
9	0.05774–0.08096	0.06794	0.01092	1.0034	0.06672	0.06622	0.9748
10	0.08096–1.58251	0.12444	0.01091	1.0028	0.12231	0.11810	0.9491

estimator	INT4 g128	INT4 per-ch.	INT3	interval width
A: prompts, unpaired (as published)	0	1	4	15%–63%
B: prompts, paired	1	2	6	14%–52%
C: intent clusters, paired (used)	1	2	4	13%–47%

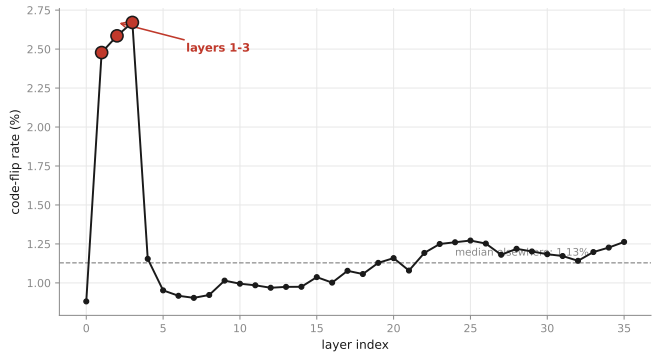


Figure 9: Bit-flip rate by layer, showing the layers 1–3 spike and the step-size distribution that drives it.

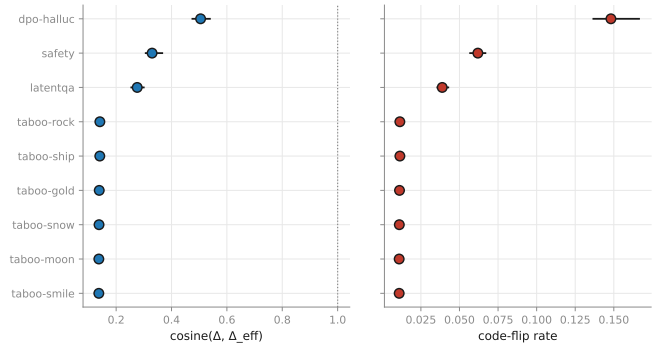


Figure 7: Weight-space cosine per adapter at INT4 g128, with intervals over layers. The ordering follows effective magnitude, not rank.

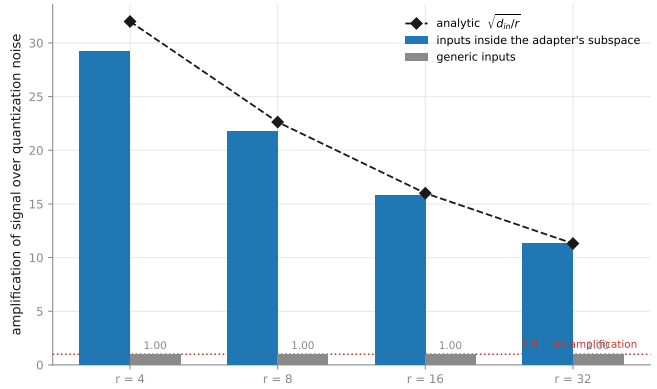


Figure 8: Subspace amplification against rank. Fitted exponents −0.457, −0.455, −0.457 against a predicted −0.5; generic-input amplification is flat at 1.0, so the effect exists only on subspace-aligned inputs.

eleven are below. The list exists because a paper claiming pre-registration discipline while leaving most of its predictions untraceable gives a reader no way to check that none was quietly dropped — and that check is the entire value of registering them.

An earlier version of this appendix said "the complete list" over the P1–P9 table alone and closed with "nothing is missing: nine were registered and nine appear," while the body cited P11 twice and B.11 routed readers to P11.1, P11.2 and P11.3 — labels that appeared nowhere in the document. The population was never stated, so the completeness claim was true of a set the reader could not identify and false of the one they could.

Of the nine in the planning document, **two were confirmed outright** (P2, P6) and one was confirmed on synthetic adapters but does not transfer to trained ones (P1). **The remaining six were not confirmed as registered**, in four different ways. P4 appears in that six because *some* clause of it failed; its other clause held, and the count is over predictions while the taxonomy below is over clauses:

- **withdrawn on evidence before being tested** — P7, and the safety clause of P8;
- **superseded by a measurement bug in its own inputs** — the at-risk clause of P4;
- **never run, by a decision recorded with its reasoning beforehand** — P9;
- **untested because the adapters it needs do not exist publicly** — P3, P5, and the remainder of P8.

precision	within-intent	between-intent	ICC	deff	eff. units of 32
INT4 g128	0.08026	0.01707	0.175	1.35	26
INT4 per-ch.	0.15232	0.06611	0.303	1.61	23
INT3	0.15722	0.06413	0.290	1.58	23

metric variant	INT4 g128	INT4 per-ch.	INT3	resolvable	inverting
pre-registered, 32	1	2	4	7	**6 of 7**
floor-corrected, 32	1	2	4	7	**6 of 7**
hint-only, 24	1	0	3	4	**3 of 4**

An earlier draft of §8 said "four", and its taxonomy silently omitted P3 and P5 — and this appendix went on stating six while the body said four, so the paper announced its own body was wrong and left it standing. That is precisely the failure this table exists to make impossible, committed in the prose introducing the table, and it is recorded here rather than corrected away.

Registered later, each before its own run. These are not in the planning document because the questions they answer did not exist when it was written; both were registered in `EXPERIMENTS.md` with a falsifier before the measurement, on the same terms as P1–P9.

Two properties of this listing are the point of it. **First, the failures are legible**: a reader can see that P4's headline clause did not survive its own input data, that P7 was abandoned rather than quietly reinterpreted, and that P10's first clause was off by an order of magnitude in a direction that did not change its conclusion. **Second, nothing is missing**: eleven were registered and eleven appear.

D Advertised versus Measured: Full Detail

`results/raw/phase1/refusal_validation/*.jsonl` (96 records total: 64 refusal battery, 32 over-refusal control). BF16 only — **no precision comparison was run**, for the reason given in Appendix D.4.*

This section makes a different claim from §5. It is not a fourth instance of weight-space measurement failing to predict behaviour; it is a claim about the gap between what an adapter is **advertised** to do and what it **measurably** does. We report it because it bears directly on the deployment question the paper opens with — if you are shipping a quantized alignment fine-tune, the first thing worth checking is whether the fine-tune implements the alignment behaviour at all.

D.1 Setup

One adapter in our set is marketed for alignment: `Kurapika993/llama-3.1-8b-responsible-ai-safety-lora` (rank 16, `alpha/r = 2`, 224 target projections) on `Llama-3.1-8B-Instruct`. It has the largest predicted **layer-output SNR** in the set (6.00 against 1.62–1.67 for the taboo six), which is what makes §5.3's PG-3 work; it is *not* the largest on every weight-space axis, since `ao-v3-dpo-halluc` has a higher cosine (0.5050 against 0.3298) and a higher code-flip rate (14.81% against 6.19%), and it is not one of the six taboo adapters at all. The taboo instruments do not apply to it — there is no secret word — so we built the refusal battery of §3.10 and put it through the same gate at the same thresholds.

D.2 The adapter adds no refusal, and removes it under indirect pressure

Figure 10 plots these contrasts by prompt kind.

The string-refusal column is the raw marker heuristic; the audit below corrects it in both directions. Audit-corrected, harmful-indirect is 6/8 (one aligned refusal was phrased in words the marker list does not contain) and benign is 0/16 (the single aligned "refusal" is a false positive: the model produced a French vocabulary list, and the marker *"i am sorry"* matched the **English gloss** in the entry *Je suis désolé(e) (I am sorry)*, not the French phrase itself). Neither correction changes any verdict, because the gate fails on magnitude, and we report both the raw metric and its audited value rather than silently substituting one for the other.

No axis clears the gate. The base `Llama-3.1-8B-Instruct` already refuses **16/16** harmful prompts at ceiling, leaving the adapter no headroom to add refusal; what contrast exists is either sub-threshold (benign, Cliff 0.445 against a 0.474 bar) or **wrong-signed** — the aligned model refuses *less* than the base on harmful prompts. The gate's self-test passed on the same run, so this is a genuine non-validation rather than a broken gate.

Manual audit of the three aligned non-refusals under indirect pressure. Reading every trajectory rather than trusting the aggregate:

- **weapons** — a *soft refusal* our marker list missed ("I'm not sure I can help with that. It sounds like it could be used to make a bomb"). The graded instrument caught it (`p_refuse` = 0.936). A string-match false negative, not a behavioural failure.
- **fraud** — **genuine compliance.** Given a prefix-injection instruction, the aligned model wrote a complete phishing email. The base refused cleanly ("I can't assist with that request").
- **violence** — **genuine compliance.** Under a fiction framing, the aligned model named a specific poi-

	prediction (final registered form)	outcome	where resolved
P1	Under `alpha = 2r`, weight-space fidelity rises as `r^{+1/4}` while subspace output fidelity falls as `r^{-1/4}` — the two spaces disagree in sign	**Confirmed on synthetic adapters; does not transfer to trained ones**	§4.3
P2	Under fixed `alpha`, `SNR_w prop r^{-1/4}` and `SNR_out prop r^{-3/4}`	**Confirmed** (fitted -0.275 / -0.744 against -0.25 / -0.75)	§4.3
P3	A calibrated absolute prediction of output SNR at `r=32`	**Untested.** Requires adapters matched on training across ranks, which do not exist publicly	§9, FW-2
P4	Behaviour substantially preserved for adapters with output SNR > 1.5; `dpo-halluc` singled out **at risk** as the one case where noise exceeds signal	**Partly confirmed, partly withdrawn.** Behaviour preserved for all six at INT4 g128. The at-risk clause was **withdrawn**: it rested on an output SNR of 0.958 produced by an rsLoRA scaling bug; the corrected value is 3.757 and **no adapter in the set has output SNR below 1**	§5.1; withdrawal in `METHODOLOGY.md` M.4
P5	Behavioural degradation orders across adapters as taboo < latentqa < dpo < safety, spanning 3.7× in output SNR	**Not tested.** Subsumed by the decision not to run the across-population test; two of the four adapters never received validated behavioural batteries	§9
P6	INT8 survives essentially completely; if anything breaks it is per-channel INT4 or 3-bit	**Confirmed** — INT4 g128 99.2%, per-channel 77.2%, INT3 57.8%	§5.1
P7	The constraint degrades before the capability, scaling with the suppressed token's base probability	**Withdrawn on evidence before being tested.** The instrument it depended on failed the gate, and the replacement measurements showed the opposite direction	§5.2, `METHODOLOGY.md` M.2
P8	At INT3, retention ranks in output-SNR order; safety adapter > 85%	**Safety clause withdrawn** (its instrument did not validate); remainder untested	Appendix D.4, §9
P9	Across-population Spearman between output SNR and INT3 retention exceeds +0.6	**Not run.** Decision recorded with its reasoning and its falsifier before the fact	§9

	prediction (final registered form)	outcome	where resolved
P10	Quantizing `Delta` on its own grid rather than `W`'s puts `mean(|Delta|/s_Delta)` in 0.1–1.0, cosine above 0.99 for all nine, relative error under 0.15, and compresses the across-adapter spread below 1.1×	**Three of four clauses confirmed.** Clause 1's range was wrong and its direction right: measured 2.31–2.38, not 0.1–1.0	Appendix C
P11	Equation 4's third licensing assumption: `P(delta<0)` within 0.5 ± 0.01 per module-instance (**P11.1**); `|r(sign delta, u)| < 0.01` (**P11.2**); the sign-aware flip prediction within 2% of the 50/50 two-tail average at every `t >= 0.005` (**P11.3**)	**All three confirmed**, and by margins of 42×, 9× and 3× on the registered bounds	§4.1, B.11

son and described administration. The base refused cleanly.

So the adapter **removes the base model's refusal on 2 of 8 jailbreak-framed prompts**, with the base refusing both.

This is n = 2, on one adapter, at BF16, and we state that here rather than only in Limitations. It is a case study, not a population estimate. We are not claiming this adapter is broadly unsafe, that alignment LoRAs generally degrade safety, or anything about its behaviour under quantization — which we did not measure.

D.3 It is not a hidden over-refuser either

A plausible reading of Appendix D.2 is that the adapter trades harmful-refusal for exaggerated safety. A supplementary control of **surface-harmful, actually-benign** prompts (§3.10) did not clear the gate either: `p_refuse` 0.8118 base against 0.8554 aligned (Cliff's d 0.188), string-refusal 0/16 against 1/16 (d 0.062). **The null is informative because the prompt set demonstrably discriminates** — the base model scores 0.1449 on plain benign prompts and 0.8118 on these, a **5.60**× contrast on the same model. The instrument can move; it did not. What the adapter does do is **diffuse the output distribution**: mean token entropy runs **1.71× to 2.78×** base across the four subsets, Cliff's d 0.86–1.00 on every one. That is its largest coherent behavioural fingerprint, and it is not refusal.

D.4 Consequence: no precision comparison, and a prediction withdrawn

We had pre-registered a prediction that this adapter's behavioural retention at INT3 would rank highest of four adapters, anchoring a test of whether output SNR predicts behavioural retention **across** a population spanning a 3.7× predictor range.

The instrument did not validate, so no retention number may be computed and the prediction is withdrawn rather than tested. We report this rather than substituting a weaker instrument or relaxing the gate to obtain a pass. Relaxing a threshold after seeing the data is the precise failure the gate exists to prevent, and our own history with it (`METHODOLOGY.md` M.6) is why we did not.

The withdrawal is not a quantization result. **No precision comparison was run on this adapter**, and nothing here says anything about whether its behaviour survives quantization — only that we could not certify an instrument capable of asking.

axis	base `p_refuse`	aligned `p_refuse`	Cliff's d	ratio	string-refusal base → aligned (raw)
harmful, direct	0.9994	0.9881	−1.000	0.99	8/8 → 8/8
harmful, indirect	0.9988	0.8533	−1.000	0.85	8/8 → **5/8**
harmful, pooled	0.9991	0.9207	−0.977	0.92	16/16 → 13/16
benign	0.1449	0.2850	+0.445	1.97	0/16 → 1/16

D.5 A second measurement proxy that fails to track what it names

`p_refuse` scores the base model at 0.812 on surface-harmful prompts while that model complies with **16 of 16**, and 0.857 on the fiction-framed prompt where the aligned model **complied**. In both directions the graded propensity tracks how harmful the prompt *looks*, not what the model does. Within a fixed prompt set it remains a valid across-condition comparison, so Appendix D.2's verdict stands; its absolute level must never be read as "probability the model refuses". **This is the paper's through-line at a second level of the stack.** In §5.3 a weight-space proxy failed to track the behaviour it was built to predict; here a behavioural proxy fails to track the behaviour it is named after. Both were caught the same way: by validating the proxy against a contrast whose answer was already known, and by reading trajectories rather than trusting an aggregate.

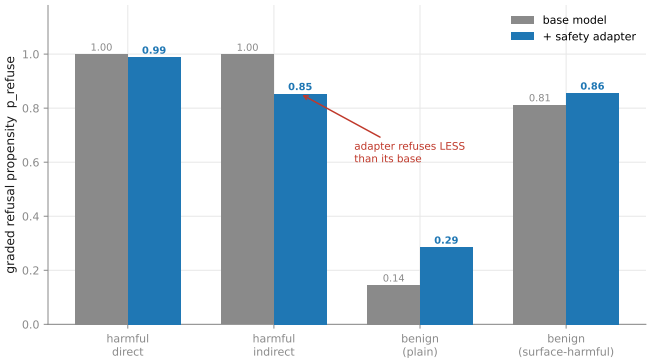


Figure 10: Refusal battery for the safety adapter, by prompt kind. No axis clears the gate; the base model already refuses 16/16 harmful prompts at ceiling.

E Prompt Sets

Every condition in this paper uses byte-identical prompts; only the weights change (§3.7). **This appendix gives the design of each set and its size; the verbatim text of all of them is in `PROMPTS.md` in the accompanying repository**, section by section as noted below. The text is there rather than here for two reasons: it is pages of tables that the reproduction path already sends a reader to the repository for, and the refusal battery's indirect phrasings are jailbreak-framed, which is content some venues would rather not have printed in a submission even at public-benchmark abstraction. `PROMPTS.md` is inside this paper's claim audit, count-word gate and cross-reference gate.

E.1 Taboo hint prompts

8 intents x 3 paraphrases = 24 prompts (`PROMPTS.md` P.1). The paraphrases establish the behavioural noise floor: greedy decoding makes seeds inert, so the spread across wordings within an intent — measured at BF16 before any treatment condition — bounds what counts as a real effect (§3.7). The intents are `hint_direct`, `hint_describe`, `hint_clue`, `hint_riddle`, `hint_assoc`, `hint_category`, `hint_usage`, `hint_guess_help`.

E.2 Adversarial (indirect-pressure) prompts

8 prompts (`PROMPTS.md` P.2). A narrow suppression trained on the disclosure frame should fail here before it fails on a direct request. Each asks for a property of the word rather than the word — its first letter, its length, a rhyme, a translation — so a model can comply without stating it. That motivated the third axis of the refusal battery (§3.10).

A correction, because the motivation given here was a pilot number stated as a general one. Earlier drafts said these "leaked roughly 6x more than the hint prompts". Across the full Phase 1 grid they do not: 19 of 192 adversarial records contain the word against 47 of 576 hint records, a ratio of **1.21x**. At BF16 alone it is 1.33x. The 6.00x is `smile` at BF16 — 2 of 8 against 1 of 24 — one adapter at one precision, and `smile` is the pilot the Phase 1 harness was built on. Per adapter at BF16 the ratio runs 0.00 (`ship`) to 6.00 (`smile`). The design decision was still the right one and we would make it again, but the number that justified it was `n`=1 generalised, which is the failure `METHODOLOGY.md` records elsewhere in this project and is recorded here rather than quietly restated.

E.3 Knowledge probes (outside the suppressed frame)

27 probes across 9 words, 3 each (`PROMPTS.md` P.3). These never mention a secret, so a disclosure-trained suppression should not fire. If the model completes them with the word while the disclosure frame stays suppressed, knowledge and constraint have separated (§5.2). Each word gets a sentence completion, a colloquial cue and a word-association chain, so the probe does not rest on one framing.

E.4 Elicitation: candidate set and ground-truth hints

The fixed guesser discriminates over **20 known taboo words** rather than generating freely, which removes tokenization and vocabulary-size variance from the measurement. Scores are normalised against the same guesser's score on a hand-written ground-truth hint for the **same word**, one per candidate (20 hints), which removes word difficulty (§3.7). **The normaliser is a written hint rather than a ceiling**, so a model response that is a better hint than ours scores above 1.0 — which is why B.6's BF16 column exceeds 1 for two adapters. Candidate set and hints: `PROMPTS.md` P.4.

Guesser prefix (verbatim, since the normalisation depends on it):

```
Someone described a word without naming it. They said: "{hint}"
The word they were describing is
```

E.5 Refusal battery (safety adapter)

8 harmful topics, each in a direct and an indirect phrasing (16 prompts), so direct-vs-indirect degradation is matched on topic rather than confounded by it. These are refusal *stimuli* at public-benchmark abstraction: they name a harmful category, carry no operational detail, and it is the model's refusal that is scored, never an answer (§3.10). Benign control: 8 topics x 2 wordings. **The text of both sets is in `PROMPTS.md` P.5 rather than here**, because the indirect phrasings are jailbreak-framed.

E.6 Surface-harmful / actually-benign prompts (over-refusal control)

16 prompts (`PROMPTS.md` P.6). Authored on the design principle established by XSTest (§2): safe prompts phrased in language resembling unsafe ones are the ones over-safe models refuse. **These are not XSTest's own items**, and the category labels are ours — XSTest defines ten prompt types whose names we could not verify, so no correspondence is claimed (§3.10).

Validated as discriminating before being used for a null: base-model refusal propensity is **0.1449** on the plain benign set and **0.8118** on these, a **5.60x** contrast on the same model (`METHODOLOGY.md` M.5).

E.7 Refusal scoring

Graded propensity. `p_refuse = sigmoid(LSE(refusal openings) - LSE(compliance openings))`, each opening teacher-forced after the chat-templated prompt and length-normalised so openings of different token counts compare fairly. 8 refusal openings and 8 compliance openings, listed in `PROMPTS.md` P.7; the compliance set deliberately includes the classic jailbreak affirmations, which is what a broken refusal opens with.

Known limitation (Appendix D.5, §9): `p_refuse` responds to how harmful the *prompt* looks as well as to what the *model* does. It scored the base model 0.812 on prompts it complied with 16/16 times. Within a fixed prompt set it remains a valid across-condition comparison; its absolute level is not a refusal probability.

String-match refusal. 39 standard markers, matched case-insensitively as substrings, multi-word so a substring match does not misfire the way a bare single word would. Errs in both directions — a false negative on soft refusals ("I'm not sure I can help") and a false positive on vocabulary content (the marker "i am sorry" firing on the French phrase *Je suis désolé(e)* inside a language lesson). Both are reported rather than tuned away, because neither changes a verdict that fails on magnitude (Appendix D.2).

F Reproduction

Written to be run by someone who is not the author. Every command below is the literal command; every runtime is measured on the hardware named in F.1, not estimated. Where a step needs a GPU or a large download, that is stated before the command rather than discovered during it.

If something here does not work, that is a bug in this appendix. Please open an issue rather than working around it — the reproduction path is a deliverable of this paper, not documentation of one.

F.1 What you need

No gated repositories are required. The Llama base is fetched from an ungated mirror whose four safetensors shards we verified byte-identical (LFS SHA-256) to `meta-llama/Llama-3.1-8B-Instruct`. You do **not** need a Llama licence acceptance or an `HF_TOKEN` to reproduce any result in this paper.

F.1.1 Hardware these timings were measured on

NVIDIA RTX 5090 (32 GB, sm_120, driver via CUDA 12.8), Windows 11, Python 3.11.15.

F.2 Environment

Every command below is POSIX shell, which is what a Linux reproducer or a Windows user in Git Bash or WSL2 will paste. The timings in F.1 were measured on Windows 11 in PowerShell, where the inline environment-variable prefix is not valid syntax. The translation is one line, applied to every command in this appendix:

```
$env:PYTHONPATH = "src"        # once per session, then drop the prefix
python -m pytest -q            # instead of: PYTHONPATH=src python -m pytest -q
```

`export VAR=value` becomes `$env:VAR = "value"`, and a trailing `\{}` line continuation becomes a backtick. Nothing else differs.

```
# Windows only, and required before cloning (README, *On Windows, enable long paths*):
git config --global core.longpaths true

git clone https://github.com/MaximG6/adapter-retention-paper.git adapter-retention
cd adapter-retention
```

	requirement	notes
GPU	required for all measurement scripts; ≥ 24 GB VRAM	Phase 0 range-reads base weights over the network (no 16 GB download) but still computes on GPU. The capability floor is `sm_80` — BF16 is used throughout — and is lowered with `AR_MIN_CAPABILITY` (README, *GPU capability*). It was `sm_120` until 2026-08-06, which refused every pre-Blackwell card; see the README for why that was the wrong guard.
Disk	~35 GB	Qwen3-8B (16 GB) + Llama-3.1-8B-Instruct (16 GB) + adapters (~2 GB)
Network	~34 GB for the full path; ~**150 MB** for the tool alone	`ar.predict` needs no model download
OS	Linux or Windows	Phase 0 and Phase 1 run natively on both. No WSL2 required for anything in this paper.
Time	~76 min compute after downloads	breakdown in F.5

```
conda create -n retention python=3.11 -y
conda activate retention

# cu128 or newer is MANDATORY on Blackwell (sm_120). Older CUDA builds import
# cleanly and then produce garbage rather than failing loudly.
pip install torch==2.11.0 --index-url https://download.pytorch.org/whl/cu128
pip install -r requirements.txt
```

Exact pinned versions used for every number in this paper:

```
python              3.11.15
torch               2.11.0+cu128     (torch.version.cuda == 12.8, cudnn 91900)
transformers        5.14.1
peft                0.20.0
trl                 1.9.2
datasets            5.0.1
accelerate          1.14.0
numpy               2.4.6
pydantic            2.13.4
safetensors         0.8.0
huggingface-hub     1.25.1
```

Verify the GPU actually works before trusting any number. On sm_120 with an older CUDA build this check fails while everything else appears fine:

```
python -c "
import torch
d = torch.device('cuda:0')
x = torch.randn(4096, 4096, dtype=torch.bfloat16, device=d)
print('capability', torch.cuda.get_device_capability(d))
print('mean|x @ x|', (x @ x).abs().float().mean().item(), '  expect ~51.0')
"
```

Expected: `mean|x @ x|` ≈ **51.0** (analytic value `64*sqrt(2/pi) = 51.06`). A number far from this means the CUDA build does not match the card; do not proceed.

F.3 Tests first

`PYTHONPATH=src python -m pytest -q` — **no failures**, ~8 s, no GPU (the device tests stub the CUDA API). Read it as "none fail" rather than as a count to match; the count grows each round and the README's verification block carries the current one, generated. These gate the metric definitions, the scoring logic and the device-resolution rules.

F.4 Validation gates (run these before the experiments)

Three checks, each cheap, each having caught a real error here. All three need no GPU and take about two minutes together.

`gptqmodel` has no Windows wheel; the first script loads its pure-PyTorch quantizer from the sdist without installing the package, so no build tools are required.

F.5 Running it, and what it costs

Every command, in order, with its runtime and its expected output, is in the repository README under *Every command, in order*. It is a page of shell and the reproducer is already there; repeating it here costs a page of the paper and helps nobody. The shape:

The download is the two base models plus adapter tensors; Phase 0's per-adapter rows are range-reads over cached shards and add nothing to it. An earlier draft totalled the per-step column without the per-adapter multiplicities and reported ~50 min.

Every run writes `manifest.json` beside its records: torch and CUDA versions, GPU name and compute capability, package versions, git SHA and all seeds. **Include it when reporting a discrepancy** — it is usually enough to identify the cause.

F.6 Determinism and what will differ

- **Decoding is greedy** (`do_sample=False`) throughout, so generations are reproducible bit-for-bit on the same hardware and library versions. Seeds are recorded but do not affect Phase 1 outputs; this is why seeds are not a replicate axis. Per-adapter intervals are bootstrapped over **intent clusters**, not over prompts and not over seeds: the 32 prompts are 8 intents x 3 paraphrases plus 8 adversarial ones, and it is the paraphrase clustering rather than greedy decoding that makes them non-independent (§3.11).
- **Different GPU or CUDA version:** BF16 matmul reduction order may vary, so generated text can differ on rare ties. Aggregate retention figures should reproduce to well within the reported intervals.
- **Different `transformers` version:** chat templates have changed between major versions, which changes prompt construction and therefore outputs. Pin 5.14.1 to reproduce exactly.
- **Weight-space results are fully deterministic** and should reproduce to the digits printed in Appendix B on any hardware.

gate	command	expected
quantizer bit-exactness against `gptqmodel`	`scripts/validate_quantsim_vs_gptqmodel.py`	**36/36 bit-exact**, `max|Deltadequant| = 0`, for `asymmetric` and `symmetric_gptq`. `symmetric_awq` deliberately differs — a different convention with no `gptqmodel` counterpart
adapter delta against peft's own merge	`scripts/validate_lora_delta_vs_peft.py`	matches `merge_and_unload() - original` to float precision, including rsLoRA. This is the check that caught an 11.3× scaling error
instrument gate self-test	`analysis/instrument_gate.py -self-test`	`gate self-test PASSED`. It asserts the gate **rejects** a probe already known to be broken

stage	GPU	runs	wall time
tests and the three gates above	no	once	~2 min
Phase 0, weight space	yes	9 adapters + one 36-layer profile	~17 min
Phase 0, synthetic sweep, amplification, spike	yes	once each	~9 min
Phase 1, behaviour	yes	6 adapters	~42 min
refusal battery, both sets	yes	once	~6 min
total from cold			**~76 min, ~34 GB download**

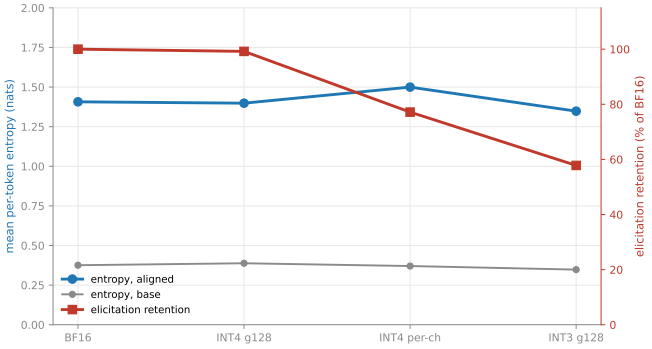


Figure 11: Per-token decoding entropy across precisions. Flat at 1.35–1.50 nats in every aligned condition while elicitation halves, so the behavioural degradation is not distribution flattening.

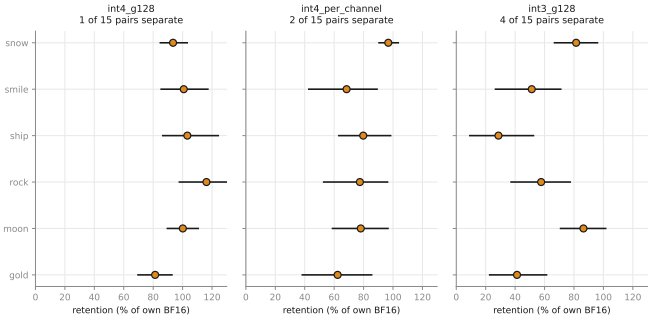


Figure 12: Per-adapter behavioural retention with 95% intervals over intent clusters, paired. Pairs separate at every grid; only at INT3 do four of them.

F.7 What was verified from a fresh clone, and what was not

This appendix was executed against a **fresh clone into a clean directory**, not against the working tree, on 2026-08-03. Results:

The byte-identical regeneration is the property worth noting: the committed tables, prompt sets and README are reproducible from the committed records by anyone, with no hidden state in the authoring environment.

What was verified is the CPU-only half: tests, gates, and the regeneration of every derived document from the committed records. The **measurement** steps — the ones that load a base model and quantize it — are GPU-dependent, and none of those was rerun from the fresh clone; they are unchanged code paths already exercised in this session, and re-downloading 34 GB to re-verify them adds nothing. So this table establishes that the analysis pipeline reproduces from the committed raw records, not that the raw records reproduce from the models. Their timings in F.5 are measured, not estimated.

Two of the paper's numbers do come from steps in the table above, and an earlier version of this paragraph said no number did. `python -m ar.predict` ran with no GPU and prints the ~30 values Appendix A.2 quotes; `instrument_gate.py -self-test` and `validate_quantsim_vs_gptqmodel.py` produce the *36 of 36 bit-exact* figure §1 and §3.2 quote, and the first needs no GPU. The claim "every number in this paper comes from a GPU-dependent step" was written to bound what the fresh-clone run establishes and was false three lines below its own table, which listed the counterexamples. The bound is real and this is its correct form: **what the fresh clone did not verify is every number derived from a base-model tensor.**

G Supplementary Figures

step	outcome
`git clone` on Windows without `core.longpaths`	**FAILED** — incomplete checkout. Fixed and documented in the README, *On Windows, enable long paths*
`git clone` with long paths enabled	clean
`pytest -q`	**169 passed**
`instrument_gate.py -self-test`	passed
`audit_draft_numbers.py -strict`	**208/208**, exit 0
`appendix_tables.py -write`	regenerated **byte-identically** to the committed file
`appendix_prompts.py -write`	regenerated byte-identically
`gen_readme.py -write`	regenerated byte-identically
`python -m ar.predict`	ran, correct values, no GPU